
Uponor Combi Port M-BaseX HeatInterface IH 15 CB 6D TL ZV ZH CR NI NC

1103003

IH version for domestic hot water and indirect heating systems using second heat exchanger with heating circuit connections including heating pump and expansion tank mounted on the back of heat interface unit.

Dimensioning codes:


- 15, 21, 27 domestic hot water capacity indication (I/min)
- CB copper brazed stainless steel heat exchanger for domestic hot water preparation
- 6D all system connections in the bottom of heat interface unit
- TL thermostatic temperature limiter for domestic hot water with submersible sensor
- ZV zone valve in residential heating circuit return line without actuator
- ZH apartment heating circuit circulation arrangement, including circulation pump, thermostatic flow controller and expansion tank
- CR heat interface metal cover casing white powder coated (RAL 9016)
- NI no pipe insulation and/or insulated cover
- NC no cold water outlet from heat interface unit

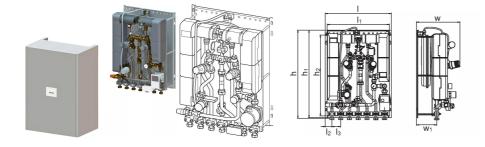

Product data sheet

Uponor Combi Port M-BaseX HeatInterface IH 15 CB 6D TL ZV ZH CR NI NC

1103003

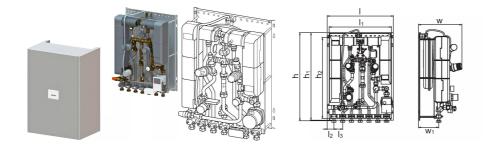

Technical data

Item no EAN	6414905486953
Item no GTIN	06414905486953
Item (unit of measurement)	pce
Length (I)	490 mm
Length (I1)	50 mm
Length (I2)	50 mm
Z-measurement b1	65 mm
Z-measurement h	321 mm
Z-measurement h1	150 mm
Z-measurement w	684 mm
Packaging Quantity 1	1
Packaging GTIN PL1	06414905486960
Packaging GTIN PL4	06414905486977
Item Unit Length	710
Item Unit Height	345
Item Unit Weight	37
Item Unit Width	498

Uponor UK

Blackmor Lane The Pavilion WD18 8GA, Watford UK

T +44 (0)1923 927000 E enquiries.uk@uponor.com

www.uponor.com/en-gb