

## Uponor Combi Port M-BaseX HeatInterface IH 27 CB 6D TL ZV ZH CR NI NC

**1103008**

IH version for domestic hot water and indirect heating systems using second heat exchanger with heating circuit connections including heating pump and expansion tank mounted on the back of heat interface unit.

Dimensioning codes:

15, 21, 27 – domestic hot water capacity indication (l/min)

CB – copper brazed stainless steel heat exchanger for domestic hot water preparation

6D – all system connections in the bottom of heat interface unit

TL – thermostatic temperature limiter for domestic hot water with submersible sensor


ZV – zone valve in residential heating circuit return line without actuator

ZH – apartment heating circuit circulation arrangement, including circulation pump, thermostatic flow controller and expansion tank

CR – heat interface metal cover casing white powder coated (RAL 9016)

NI – no pipe insulation and/or insulated cover

NC – no cold water outlet from heat interface unit

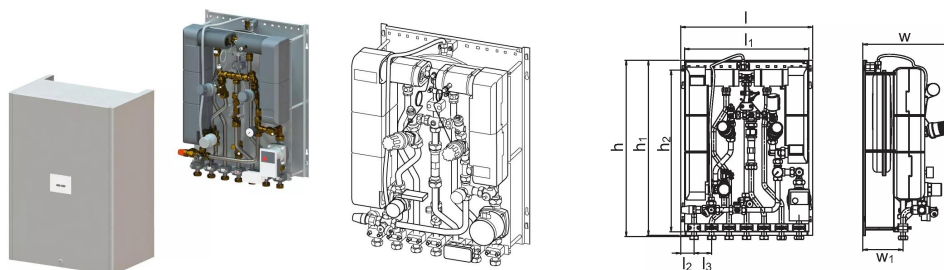

## About Uponor Combi Port M-BaseX HeatInterface IH

### Specification

- port completely assembled and pressure tested
- DVGW certified PM Valve with patented triple-sealing technology
- pipe clamps made of plastic for sound protection and thermal decoupling
- 2 heat exchangers: for heating and domestic hot water
- secondary heating circulation pump with temperature control
- spacer for heat meter 110 mm x3/4"
- spacer for water meter 110 mm x3/4"
- fill and drain valve
- strainer for cold water 0,5 mm
- strainer for primary heating supply line 0,5 mm
- connection possibility (marked) of an electrical earthing lug
- max. operating pressure heating: PN10
- max. operating pressure sanitary: PN10
- max. operating temperature: 85 °C
- min. pressure primary sanitary: 2 bar
- max. differential pressure primary heating: 2,5 bar
- fitting material sanitary: CW617N
- fitting material heating: CW617N, CW614N
- pipe work: stainless steel 1.4401
- including cabinet cover, white powder coated (RAL 9016)

### Application


- Decentralized instantaneous domestic hot water generation
- Underfloor heating systems
- Radiator heating systems

### Certification

- DVGW approval

## Uponor Combi Port M-BaseX HeatInterface IH 27 CB 6D TL ZV ZH CR NI NC

1103008

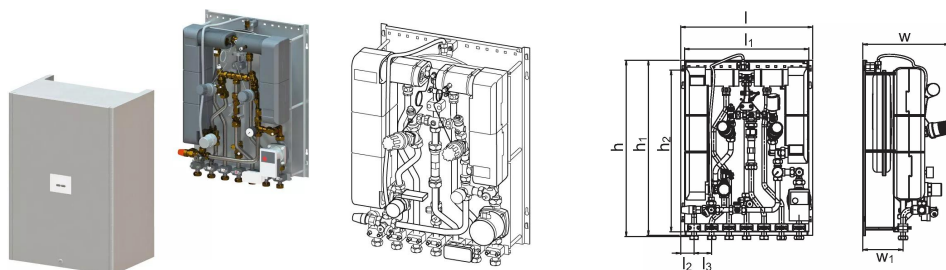

### Technical data

Item no EAN	6414905487103
Item no GTIN	06414905487103
Item (unit of measurement)	pce
Packaging Quantity 1	1
Packaging Quantity 4	3
Packaging GTIN PL1	06414905487110
Packaging GTIN PL4	06414905487127
Item Unit Length	565
Item Unit Height	385
Item Unit Weight	37
Item Unit Width	235

### Technical documents

[Download documents here](#)

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)