


Uponor Combi Port M-ProX Filling Loop IH

1103135

Flexible connection hose with ball valves and fittings for filling the heating circuit side with water

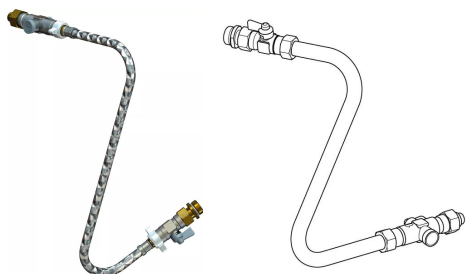

About Uponor Combi Port M-ProX Filling Loop IH

Specification

- port completely assembled and pressure tested
- DVGW certified PM Valve with patented triple-sealing technology
- pipe clamps made of plastic for sound protection and thermal decoupling
- 2 heat exchangers: for heating and domestic hot water
- thermostatic bypass valve
- secondary heating circulation pump with temperature control
- spacer for heat meter 110 mm x3/4"
- spacer for water meter 110 mm x3/4"
- fill and drain valve
- strainer for cold water 0,5 mm
- strainer for primary heating supply line 0,5 mm
- connection possibility (marked) of an electrical earthing lug
- max. operating pressure heating: PN10
- max. operating pressure sanitary: PN10
- max. operating temperature: 85 °C
- min. pressure primary sanitary: 2 bar
- max. differential pressure primary heating: 2,5 bar
- fitting material sanitary: CW617N
- fitting material heating: CW617N, CW614N
- pipe work: stainless steel 1.4401
- including cabinet cover, white powder coated (RAL 9016)

Application


- Decentralized instantaneous domestic hot water generation
- Underfloor heating systems
- Radiator heating systems

Certification

- DVGW approval

Uponor Combi Port M-ProX Filling Loop IH

1103135

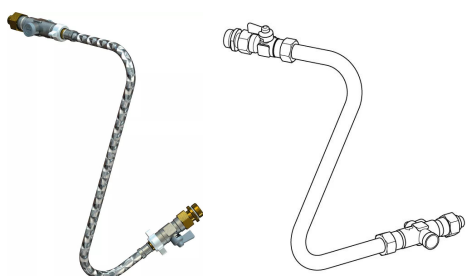

Technical data

Item no EAN	6414905524839
Item no GTIN	06414905524839
Item (unit of measurement)	pce
Packaging Quantity 1	1
Packaging Quantity 4	120
Packaging GTIN PL1	06414905524877
Packaging GTIN PL4	06414905524884
Item Unit Length	220
Item Unit Height	100
Item Unit Weight	0,5
Item Unit Width	160

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb