


Uponor Ecoflex Thermo connection set twin hp 2x40x3,7-2x32x3,5/175

L=8m

1105780

- A to B connection set include
- Ecoflex Thermo Twin HP heating pipe
- 2 pieces of Quattro rubber end caps
- 4 pieces of Couplings
- 30m of Trench warning tape
- box size in table = w,b,h

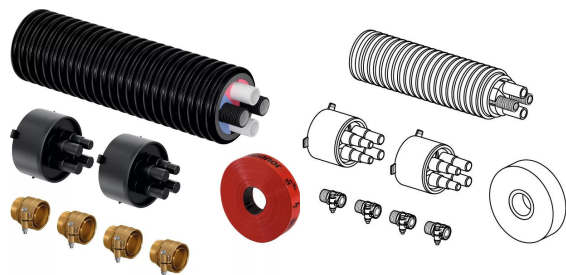

About Uponor Ecoflex Thermo connection set twin hp

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) or PN 10 (SDR 7,4), Oxygen tightness based on EN 15632
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application

- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons


Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Thermo connection set twin hp 2x40x3,7-2x32x3,5/175

L=8m

1105780

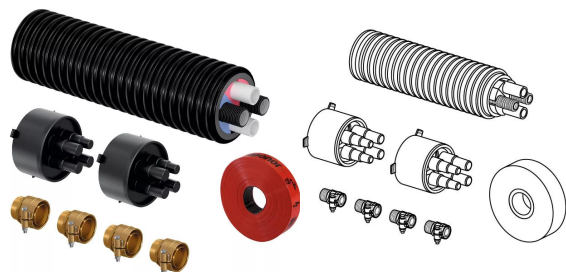

Technical data

| | |
|----------------------------|----------------|
| Item no EAN | 6414905528783 |
| Item no GTIN | 06414905528783 |
| Item no VVS | 087808833 |
| Item (unit of measurement) | set |
| Packaging Quantity 1 | 1 |
| Packaging Quantity 4 | 3 |
| Packaging GTIN PL1 | 06414905542857 |
| Packaging GTIN PL4 | 06414905542864 |
| Item Unit Length | 1550 |
| Item Unit Height | 1650 |
| Item Unit Weight | 31,5 |
| Item Unit Width | 400 |

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb