


Uponor Ecoflex VIP Aqua Single 90x12,3/175

1119051

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- VIP + PEX foam, HDPE casing

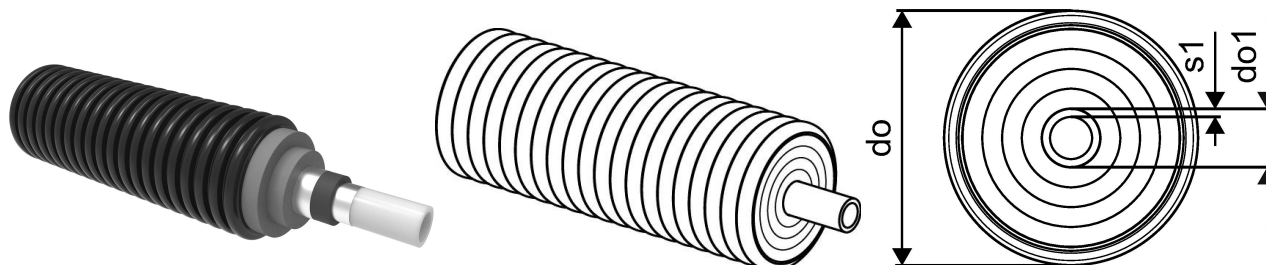

About Uponor Ecoflex VIP Aqua Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

Uponor Ecoflex VIP Aqua Single 90x12,3/175

1119051

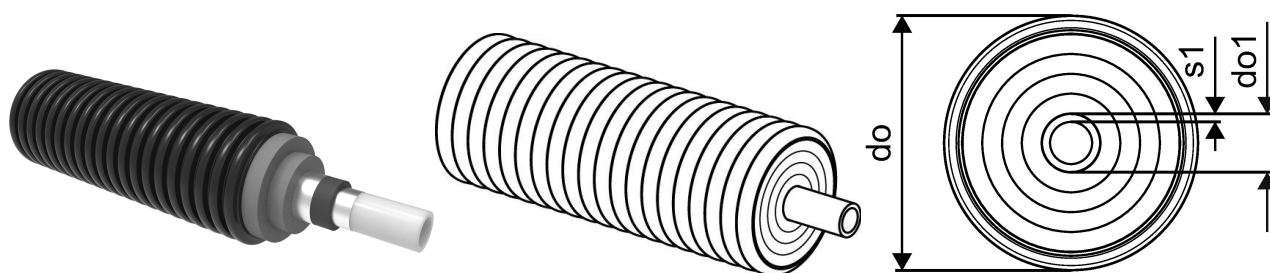

Technical data

Item no EAN	6414905556335
Item no GTIN	06414905556335
Item no VVS	087364090
RSK no.	2266377
Item no NRF	8360968
Item no LVI	3010297
Item (unit of measurement)	m
Bending radius 2	1,2 m
Packaging Quantity 1	100
Packaging GTIN PL1	06414905556472
Item Unit Length	1000
Item Unit Height	175
Item Unit Weight	4,88
Item Unit Width	175

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb