


## Uponor Ecoflex VIP Aqua Single 110x15,1/175

1119052

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- VIP + PEX foam, HDPE casing

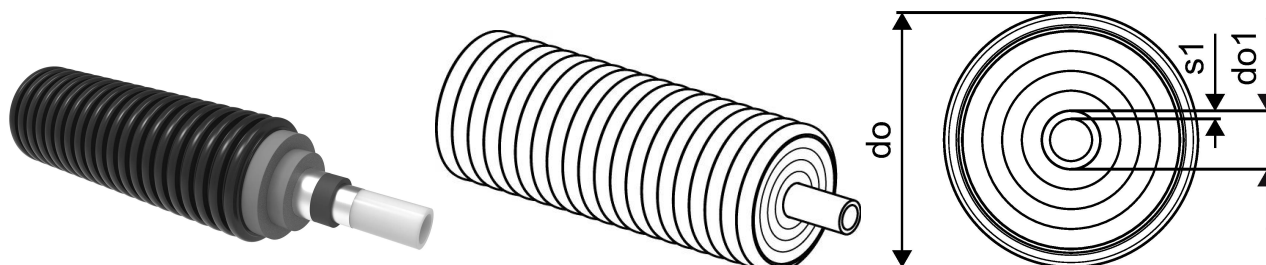

### About Uponor Ecoflex VIP Aqua Single

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approval should be checked by local responsible person

## Uponor Ecoflex VIP Aqua Single 110x15,1/175

1119052

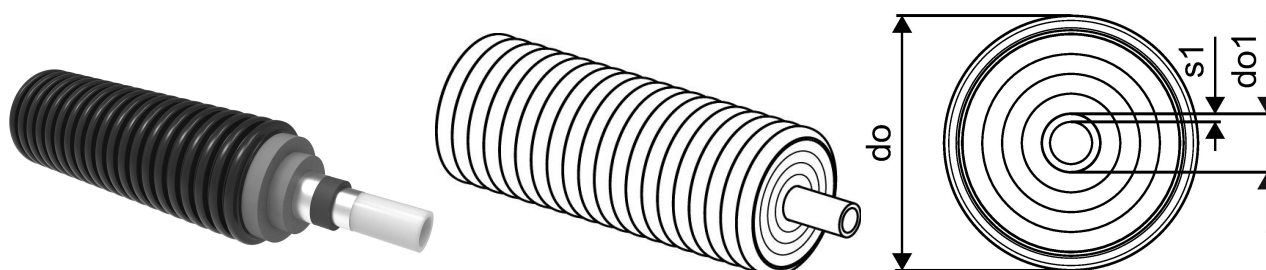

### Technical data

Item no EAN	6414905556342
Item no GTIN	06414905556342
Item no VVS	087364110
RSK no.	2266378
Item no NRF	8360969
Item no LVI	3010298
Item (unit of measurement)	m
Bending radius 2	1,3 m
Packaging Quantity 1	100
Packaging GTIN PL1	06414905556489
Item Unit Length	1000
Item Unit Height	175
Item Unit Weight	6,30
Item Unit Width	175

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)