


Uponor Fluvia T pumpgroup KRS-6


1119443

- Integrated pump: Q: 0,1 - 0,4 m³/h, H: 0,2 - 1,1 m, Phyd< 1W
- Bracket for left- or right installation
- Air bleed screw
- Secondary circuit temp. range 20-50°C
- Balancing valve
- Secondary loop 3/4" eurocone
- Primary valves with clampconnection for CU-Pipe 15mm
- For control of UFH in small zones
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C
- For installation at Uponor manifolds
- Connection G1 (MT) secondary
- Ball valve+balancing valve primary Rp 3/4 (FT)
- Supply water thermostatic control (20 - 55°C)
- Max. temperature limiter for surface mounting

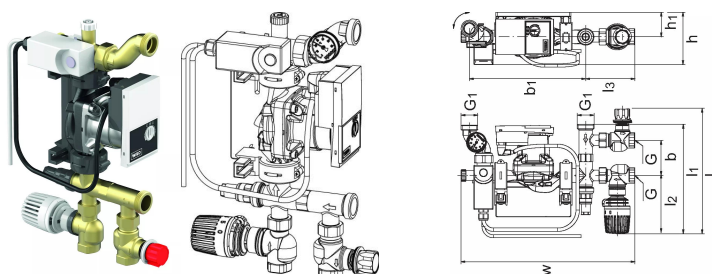

Uponor Fluvia T pumpgroup KRS-6

1119443

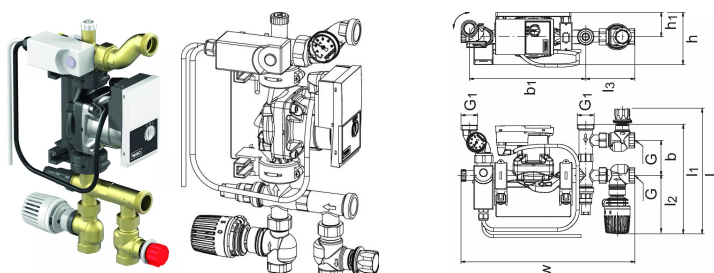

Technical data

Item no EAN	6414905650354
Item no GTIN	06414905650354
Item no NRF	8361256
Item (unit of measurement)	pce
Length (l)	251 mm
Length (l1)	218 mm
Length (l2)	116 mm
Length (l3)	98 mm
Z-measurement b	70 mm
Z-measurement b1	NaN mm
Z-measurement h	104 mm
Z-measurement h1	50 mm
Z-measurement w	347 mm
Packaging Quantity 1	1
Packaging Quantity 4	55
Packaging GTIN PL1	06414905658886
Packaging GTIN PL4	06414905650378
Item Unit Length	347
Item Unit Height	104
Item Unit Weight	4,4
Item Unit Width	249

Blackmor Lane The Pavilion
 WD18 8GA, Watford
 UK

T +44 (0)1923 927000
 E enquiries.uk@uponor.com

www.uponor.com/en-gb