


Uponor Ecoflex reducer male x female R5-4

1121639

- Outer conical thread R", hemp sealing
- Inner thread Rp", hemp sealing
- 6 bar, SDR 11 / 10 bar, SDR 7,4
- DR = dezincification resistance brass

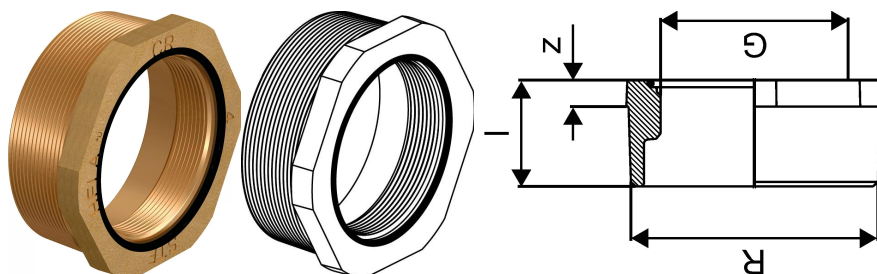

About Uponor Ecoflex reducer male x female

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex reducer male x female R5-4

1121639

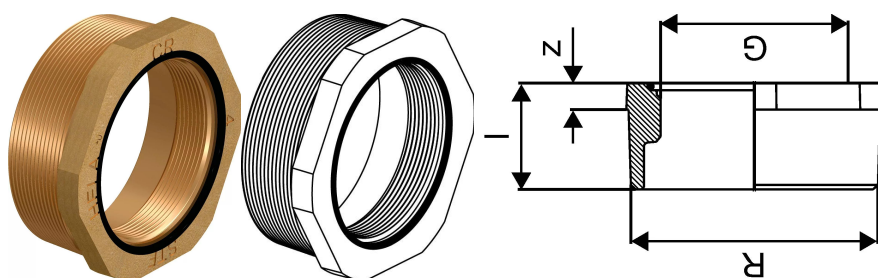

Technical data

Item no EAN	6414905661541
Item no GTIN	06414905661541
Item no VVS	087836596
RSK no.	2282766
Item no NRF	8361293
Item no LVI	1938522
Item (unit of measurement)	pce
Female_thread_Rp	4 inch
Length (l)	57 mm
z	NaN mm
Packaging Quantity 1	1
Packaging GTIN PL1	06414905672325
Item Unit Length	57
Item Unit Height	127
Item Unit Weight	2,0360
Item Unit Width	127

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb