


## Uponor Siccus Mini panel 1200x600x15mm

**1122381**

- XPS panel 1.200x600x15mm
- With full-face heat transfer layer of Aluminium
- With integrated pipe grooves c-c100mm
- For use with Uponor Comfort Pipe Minitec 9.9

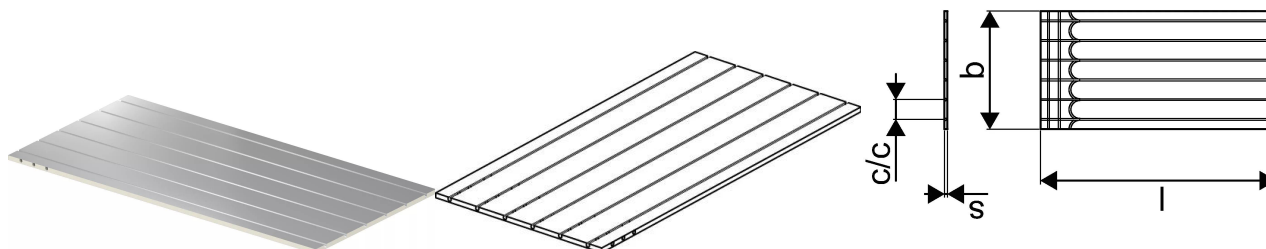

### About Uponor Siccus Mini panel

#### Specification

- Uponor Siccus Mini is a dry installation UFH system in low profile design, with prefabricated full-surface integrated heat conducting layer made of aluminium; according to EN 1264; design B.
- Panels made from XPS 400 with pipe spacing 100mm
- For installation with Uponor Comfort Pipe 9.9mm

#### Application


- radiant underfloor heating and cooling for dry-build installations
- direct flooring with laminate, wood parquet
- extra tilebacker layer 6mm for ceramic tiles and natural stone
- specified gypsum board for vinyl and carpet flooring

#### Certification

- DINCERTCO 7F515-F (laminate, wood parquet)
- DINCERTCO 7F514-F (ceramic tiles, natural stone)
- DINCERTCO 7FXXX-F (18mm gypsum layer for vinyl and carpet)

## Uponor Siccus Mini panel 1200x600x15mm

1122381

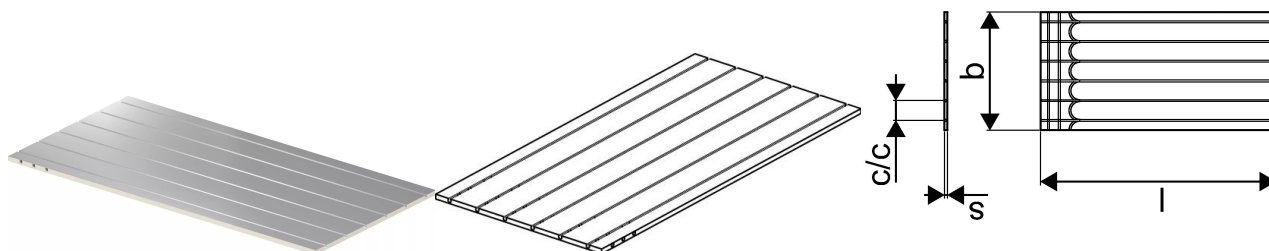

### Technical data

Item no EAN	6414905669325
Item no GTIN	06414905669325
Item no NRF	8361345
Item no LVI	2022239
Item (unit of measurement)	m <sup>2</sup>
Distance_center_center	100 mm
Length (l)	1200 mm
Z-measurement b	600 mm
Z MEASUREMENT S	15
Packaging Quantity 1	7.2
Packaging Quantity 4	144
Packaging Material short PL1	PAP
Packaging Material PL1	Corrugated fibreboard
Packaging GTIN PL1	06414900380652
Packaging GTIN PL4	06414900439817
Item Unit Length	1450
Item Unit Height	15
Item Unit Weight	0,9
Item Unit Width	600

### Technical documents

Download documents here

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)