


## Uponor Vario C manifold body FM 9x3/4 Euro

**1135374**

- Supply with flow meter for balancing and shutoff
- Return with valves and caps
- without primary connection

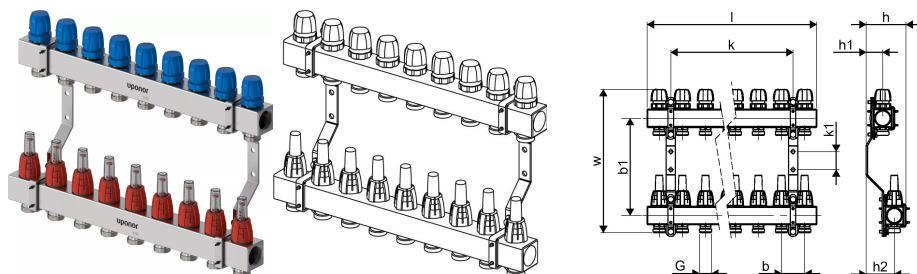

### About Uponor Vario C manifold body FM

#### Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing supply
- With flowmeter for balancing and shutoff
- Integrated airvents and fill&drain points in supply and return
- Loop connection G3/4" eurocone
- Loop distance 50 mm
- Bracket distance 210 mm

#### Application

- For underfloor heating and cooling
- Combineable with actuators FT 30x1,5
- Max. pressure: 6 bar at 60°C

## Uponor Vario C manifold body FM 9x3/4 Euro

1135374

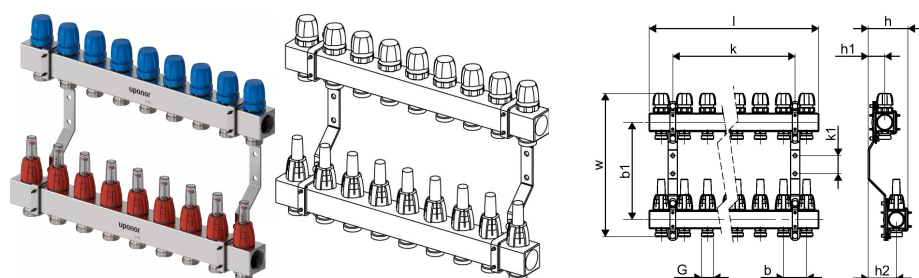

### Technical data

Item no EAN	6414900367257
Item no GTIN	06414900367257
Item (unit of measurement)	pce
Length (l)	452 mm
Length (l1)	26 mm
Z-measurement b	50 mm
Z-measurement b1	210 mm
Z-measurement h	86 mm
Z-measurement h1	36 mm
Z-measurement h2	61 mm
Z-measurement k	350 mm
Z-measurement k1	39 mm
Z-measurement w	309 mm
Packaging Quantity 1	1
Packaging Quantity 4	54
Packaging GTIN PL1	06414900424684
Packaging GTIN PL4	06414900325479
Item Unit Length	455
Item Unit Height	130
Item Unit Weight	7,40
Item Unit Width	105

### Technical documents

Download documents here

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)