


Uponor Vario S manifold LS 5xG3/4 Euro - G1

1140866

- Supply beam with lock shield valves for balancing and shutoff
- Return beam with valves for shutoff, with hand caps

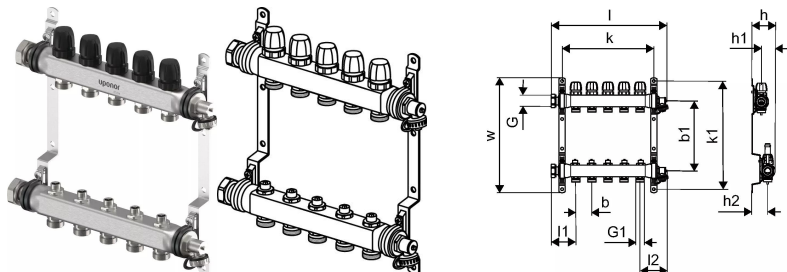

About Uponor Vario S manifold LS

Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S manifold LS 5xG3/4 Euro - G1

1140866

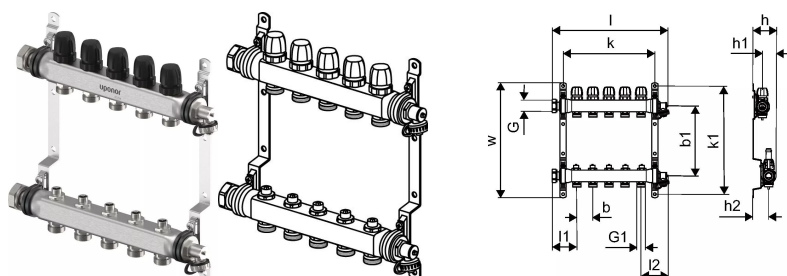

Technical data

Item no EAN	6414900440738
Item no GTIN	06414900440738
Item no VVS	046230105
Item no NRF	8361375
Item no LVI	2022249
Item (unit of measurement)	pce
Length (l1)	364 mm
Length (l2)	87 mm
Z-measurement b	50 mm
Z-measurement b1	217 mm
Z-measurement h	73 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	285 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity 1	1
Packaging Quantity 4	90
Packaging GTIN PL1	06414900500906
Packaging GTIN PL4	06414900323017
Item Unit Length	360
Item Unit Height	40
Item Unit Weight	3,7
Item Unit Width	235

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb