


## Uponor Vario S manifold LS 8xG3/4 Euro - G1

**1140869**

- Supply beam with lock shield valves for balancing and shutoff
- Return beam with valves for shutoff, with hand caps

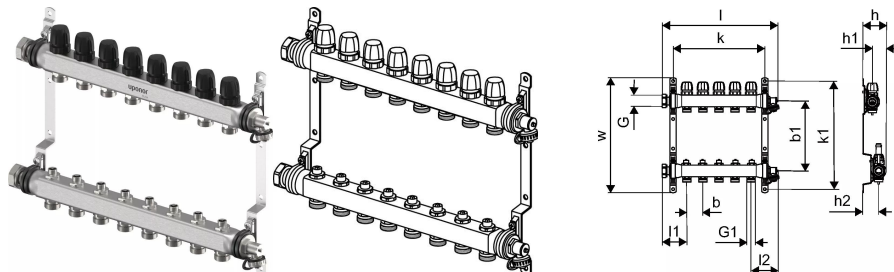

### About Uponor Vario S manifold LS

#### Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold LS 8xG3/4 Euro - G1

1140869

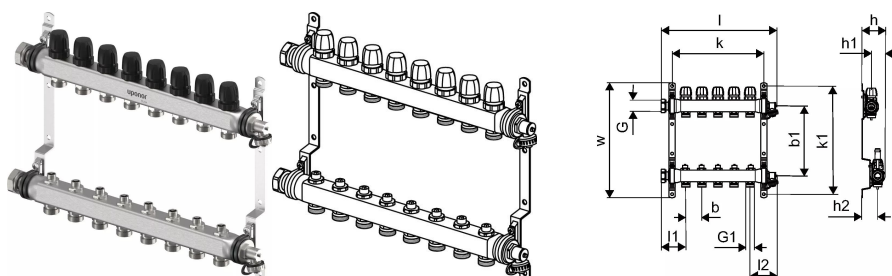

### Technical data

Item no EAN	6414900440769
Item no GTIN	06414900440769
Item no VVS	046230108
Item no NRF	8361378
Item no LVI	2022252
Item (unit of measurement)	pce
Length (l1)	514 mm
Length (l2)	87 mm
Z-measurement b	50 mm
Z-measurement b1	217 mm
Z-measurement h	73 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	435 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity 1	1
Packaging Quantity 4	54
Packaging GTIN PL1	06414900500937
Packaging GTIN PL4	06414900323048
Item Unit Length	510
Item Unit Height	40
Item Unit Weight	5
Item Unit Width	235

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)