


## Uponor Vario S manifold body FM 7xG3/4 Euro - G1

**1140883**

- Supply beam with flowmeters for balancing and shutoff, with memory ring
- Return beam with valves for shutoff, with hand caps
- Without primary connection G1

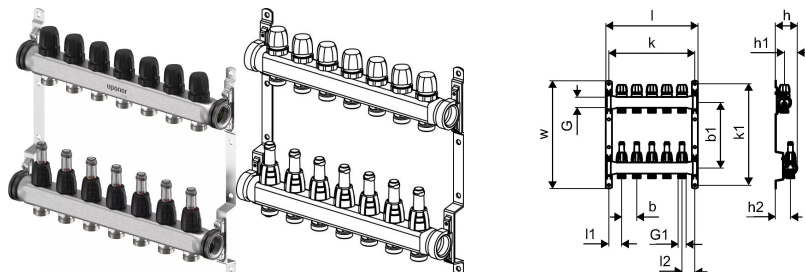

### About Uponor Vario S manifold body FM

#### Specification



- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold body FM 7xG3/4 Euro - G1

1140883

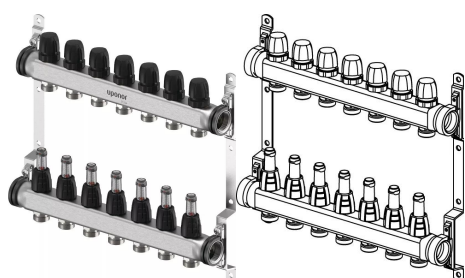

### Technical data

Item no EAN	6414900440905
Item no GTIN	06414900440905
Item no LVI	2022262
Item (unit of measurement)	pce
Length (l)	405 mm
Length (l1)	50 mm
Z-measurement b	50 mm
Z-measurement b1	217 mm
Z-measurement h	73 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	385 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity 1	1
Packaging Quantity 4	54
Packaging GTIN PL1	06414900501071
Packaging GTIN PL4	06414900323130
Item Unit Length	350
Item Unit Height	40
Item Unit Weight	4,3
Item Unit Width	235

### Technical documents

Download documents here

[E enquiries.uk@uponor.com](mailto:E_enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)