


Uponor Vario PLUS actuator NC MT 24V 1W IP54

1141679

- Vario PLUS, MAGNA manifold actuator
- first open function,
- height: 61 mm + adaptor ring
- stroke length: 5mm
- connection cable: 2x 0.75mm²x1m

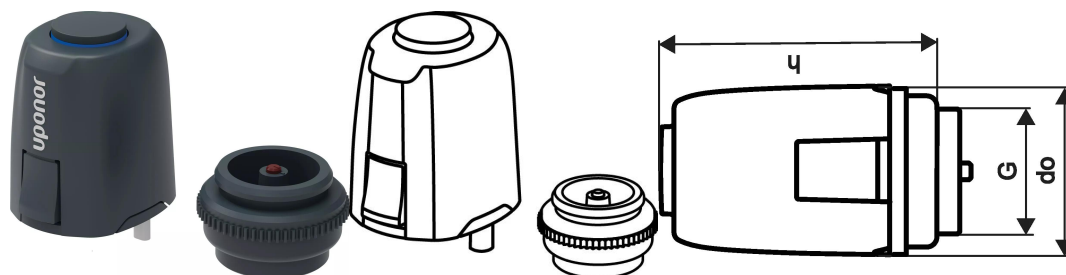

About Uponor Vario PLUS actuator NC

Specification

- Modular fibre glass reinforced polyamide manifold with 1,3,4,6 loops for connection with basic kit
- connection right or left with flat sealing or connection from below with optional elbowset
- supply with lockshield (LS) valve for balancing with adjusting ring or supply with Flowmeter (FM) for balancing
- shut-off and flow view
- adjusting ring for balancing without tools
- prepared places for room name labels
- return with valves and caps, prepared for actuators
- loop connection G3/4" eurocone
- loop pitch 50 mm
- header pitch 225 mm

Actuator:

- NC (normally closed) = closes without power

Application


- for underfloor heating and cooling
- combineable with actuators MT 30x1,5

Certification

- CE

Uponor Vario PLUS actuator NC MT 24V 1W IP54

1141679

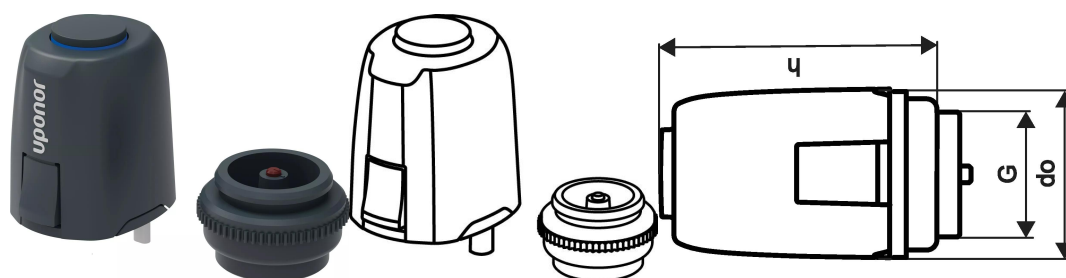

Technical data

Item no EAN	6414900383790
Item no GTIN	06414900383790
Item no VVS	466235524
RSK no.	2973124
Item no NRF	8361389
Item no LVI	2022273
Item (unit of measurement)	pce
Z-measurement h	83 mm
Packaging Quantity 1	1
Packaging Quantity 4	100
Packaging Quantity 4	1200
Packaging GTIN PL1	06414900383851
Packaging GTIN PL2	06414900385381
Packaging GTIN PL4	06414900385411
Item Unit Length	50
Item Unit Height	83
Item Unit Weight	0,12
Item Unit Width	30

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb