

ProPEX lead-free (LF) brass elbows (PEX and MIP)

Project Information

| | |
|--------------------------------|-----------------|
| Job name: | Location: |
| Engineer: | Date submitted: |
| Contractor: | Submitted by: |
| Manufacturer's representative: | Approved by: |


Technical data

| | |
|-------------------------|--|
| Material | LF Brass |
| End type 1 | ProPEX 1/2" |
| End type 2 | MNPT 1/2" |
| Temp/pressure ratings | 73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar) |
| Prop 65 label required? | Yes |

Product information and application use

Uponor ProPEX® lead-free (LF) brass elbows are available for use in hot and cold domestic potable water systems, hydronic heating and cooling systems, and AquaSAFE™ residential fire safety systems. Each end features the ProPEX fitting for connections to Wirsbo hePEX™ or Uponor AquaPEX® pipe. This product is safe for direct burial in soil.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

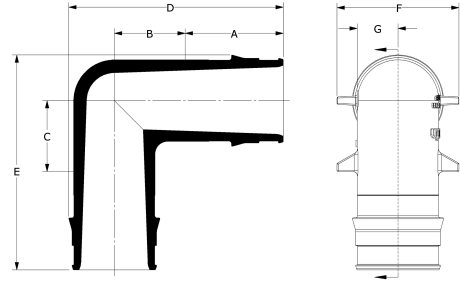

| Part name | Part no. | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | Weight per UOM [lbs/UOM] |
|--|-----------|----------|----------|----------|----------|----------|----------|----------|--------------------------|
| ProPEX LF Brass Elbow, 1/2" PEX x 1/2" MIP | LF4125050 | 0.709 | 0.521 | 0.581 | 1.655 | 1.491 | 0.85 | 0.425 | 0.12 |

| Part name | Part no. | Codes | Standards | Listings |
|--|-----------|--|--|--|
| ProPEX lead-free (LF) brass elbows (PEX and MIP) | LF4125050 | UPC IBC IRC IPC NPC of Canada UMC NSPC IMC | ASTM F877 NSF/ANSI/CAN 372 ASTM F1960 CSA B137.5 NSF/ANSI/CAN 61 NSF/ANSI 14 | ICC-ES-PMG cNSFus-pw-G IAPMO 3558 U.P.Code |

| Installation | Related applications |
|--|---|
| ProPEX expansion tools and ProPEX rings (sold separately) are required for connecting the PEX pipe. Refer to the Uponor piping systems installation guide, Radiant floor heating installation handbook or the AquaSAFE residential fire sprinkler installation guide for additional information. | <ul style="list-style-type: none"> PEX-a Plumbing Systems Uponor Residential Fire Safety Systems Radiant Heating and Cooling Systems Permafrost Protection Systems Turf Conditioning Systems |

| Footnotes | Contact information |
|-----------|---|
| - | <p>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</p> <p>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</p> |