

# Uponor PP-RCT 45 elbows, hot potable, short radius (butt fusion)




## Project Information

Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

## Product information and application use

Use Uponor PP-RCT hot potable pipe to convey water for hot potable plumbing applications. The fiber layer coextruded into the mid-wall of the pipe to reduce expansion/contraction with temperature changes also makes the pipe acceptable for use in hydronic heating and cooling applications.

**Note:** Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PP-RCT Piping Systems Manual, the Uponor PP-RCT Piping Systems Installation Guide, and the Uponor PP-RCT DHW Systems Design, Installation, and Operation Guidelines.

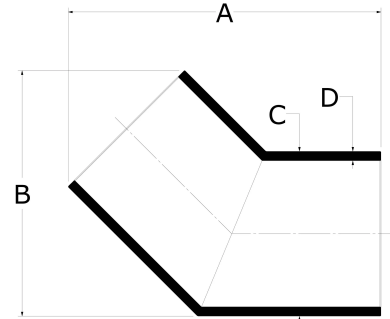

45 ELBOW  
SHORT RADIUS

## Installation

Use approved butt-fusion connection methods. Refer to the Uponor PP-RCT manual for complete details.

**Note:** Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PP-RCT Piping Systems Manual, the Uponor PP-RCT Piping Systems Installation Guide, and the Uponor PP-RCT DHW Systems Design, Installation, and Operation Guidelines.

## Related applications

- Domestic water systems
- Hydronic heating and cooling systems

## Footnotes

-

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517