

Commercial stainless-steel manifold, spare and replacement parts




Project Information

| | |
|--------------------------------|-----------------|
| Job name: | Location: |
| Engineer: | Date submitted: |
| Contractor: | Submitted by: |
| Manufacturer's representative: | Approved by: |

Product information and application use

Spare and replacement parts for Uponor Commercial stainless-steel manifold assemblies.

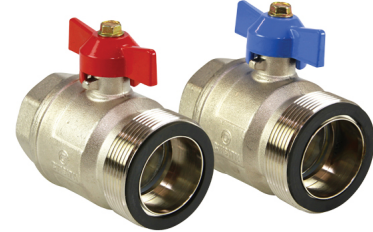

| Part name | Part no. | A [Inch] | B [Inch] | C [Inch] | Material group | Prop 65 label required? | Operating temperature min. [°F] | Operating temperature max. [°F] | Weight per UOM [lbs/UOM] |
|---|----------|----------|----------|----------|----------------|-------------------------|---------------------------------|---------------------------------|--------------------------|
| Commercial Stainless-steel Manifold Flow Meter, 0-4 gpm | A2791004 | 4.197 | 1.417 | 1.309 | Brass | Yes | - | - | 0.53 |
| Commercial Stainless-steel Manifold Loop Isolation Ball Valve | A2791010 | 2.402 | 2.241 | 1.358 | Brass | Yes | - | - | 0.6 |
| Commercial Stainless-steel Manifold 2" Flat Gasket, replacement part | A2791032 | 2.205 | 2.205 | 0.118 | Rubber | Yes | - | - | 0 |
| Commercial Stainless-steel Manifold Temperature Gauge | A2791050 | 2.5 | 2.5 | 0.767 | Aluminum | - | 32 | 176 | 0.53 |
| Commercial Stainless-steel Manifold Mounting Clips, Supply | A2791501 | 5.512 | 2.825 | 0.787 | Metal | - | - | - | 0.38 |
| Commercial Stainless-steel Manifold Mounting Clips, Return | A2791502 | 5.512 | 4.203 | 0.787 | Metal | - | - | - | 0.48 |
| Commercial Stainless-steel Manifold Ball Valve, Supply and Return, set of 2 | A2791532 | 3.74 | 3.923 | 2.559 | Brass | Yes | - | - | 3.53 |

| Part name | Part no. | Codes | Standards | Listings |
|---|----------|-------|-------------------|----------|
| Commercial stainless-steel manifold, spare and replacement parts | All | - | - | - |
| In addition, the following parts have additional codes, standards, or listings: | | | | |
| Commercial Stainless-steel Manifold Flow Meter, 0-4 gpm | A2791004 | | R25: ISO 228-G 1" | |
| Commercial Stainless-steel Manifold Loop Isolation Ball Valve | A2791010 | | R25: ISO 228-G 1" | |
| Commercial Stainless-steel Manifold Ball Valve, Supply and Return, set of 2 | A2791532 | | ISO 228 G2 | |

Installation

Related applications

-

-

Footnotes

Contact information

-

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517