

# Kits de adaptadores de llave de paso de CPVC y bronce sin plomo (LF) ProPEX



## Project Information

|                                |                 |
|--------------------------------|-----------------|
| Job name:                      | Location:       |
| Engineer:                      | Fecha de envío: |
| Contractor:                    | Presentada por: |
| Manufacturer's representative: | Approved by:    |


## Technical data

|                         |                                                                                                                |
|-------------------------|----------------------------------------------------------------------------------------------------------------|
| Material                | LF Brass                                                                                                       |
| Subcomponent Material   | Body: LF Brass and CPVC<br>O-ring: EPDM                                                                        |
| Temp/pressure ratings   | 73 °F (23 °C) at 160 psi (11 bar)<br>180 °F (82 °C) at 100 psi (6.9 bar)<br>200 °F (93 °C) at 80 psi (5.5 bar) |
| Prop 65 label required? | Yes                                                                                                            |

## Product information and application use

ProPEX® Lead-free (LF) Brass CPVC Spigot Adapter Kit transitions Uponor PEX pipe to CPVC copper tube size (CTS) or iron pipe size (IPS) fittings for use in hot and cold domestic potable-water systems and hydronic radiant heating and cooling systems.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

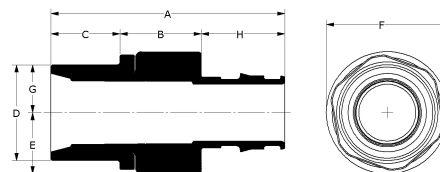

| Part name                                                                        | Part no.  | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | H [inch] | End Type 1    | End Type 2  |
|----------------------------------------------------------------------------------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|-------------|
| ProPEX LF Brass x CPVC Spigot Adapter Kit, 1 1/4" PEX x 1 1/4" CPVC (IPS or CTS) | CP4501300 | 4.055    | 1.41     | 1.2      | 1.656    | 1.055    | 2.11     | 0.828    | 1.445    | ProPEX 1-1/4" | CPVC 1-1/4" |
| ProPEX LF Brass x CPVC Spigot Adapter Kit, 1 1/2" PEX x 1 1/2" CPVC (IPS or CTS) | CP4501500 | 4.554    | 1.46     | 1.39     | 1.9      | 1.2      | 2.4      | 0.95     | 1.704    | ProPEX 1-1/2" | CPVC 1-1/2" |
| ProPEX LF Brass x CPVC Spigot Adapter Kit, 2" PEX x 2" CPVC (IPS or CTS)         | CP4502000 | 5.372    | 1.75     | 1.39     | 2.37     | 1.5      | 3.0      | 1.185    | 2.147    | ProPEX 2"     | CPVC 2"     |

| Part name                                                                        | Part no.  | Weight per UOM [lbs/UOM] |
|----------------------------------------------------------------------------------|-----------|--------------------------|
| ProPEX LF Brass x CPVC Spigot Adapter Kit, 1 1/4" PEX x 1 1/4" CPVC (IPS or CTS) | CP4501300 | 0.6                      |
| ProPEX LF Brass x CPVC Spigot Adapter Kit, 1 1/2" PEX x 1 1/2" CPVC (IPS or CTS) | CP4501500 | 0.75                     |
| ProPEX LF Brass x CPVC Spigot Adapter Kit, 2" PEX x 2" CPVC (IPS or CTS)         | CP4502000 | 1.4                      |

| Part name                                                                   | Part no. | Codes                                      | Standards                                                                               | Listings                                             |
|-----------------------------------------------------------------------------|----------|--------------------------------------------|-----------------------------------------------------------------------------------------|------------------------------------------------------|
| Kits de adaptadores de llave de paso de CPVC y bronce sin plomo (LF) ProPEX | All      | UPC IBC IRC IPC NPC of Canada UMC NSPC IMC | ASTM F877 NSF/ANSI/CAN 372 ASTM F1960 CSA B137.5 ASTM D2846 NSF/ANSI/CAN 61 NSF/ANSI 14 | IAPMO-ES ICC-ES-PMG cNSFus-pw-G U.P.Code cQAIus P321 |

In addition, the following parts have additional codes, standards, or listings:

|                                                                                  |           |  |  |             |
|----------------------------------------------------------------------------------|-----------|--|--|-------------|
| ProPEX LF Brass x CPVC Spigot Adapter Kit, 1 1/2" PEX x 1 1/2" CPVC (IPS or CTS) | CP4501500 |  |  | HUD MR 1269 |
| ProPEX LF Brass x CPVC Spigot Adapter Kit, 2" PEX x 2" CPVC (IPS or CTS)         | CP4502000 |  |  | HUD MR 1269 |

## Installation

Use the appropriate Uponor ProPEX Ring for the tubing (sold separately). Refer to the Uponor AquaPEX® Professional Plumbing Installation Guide or Uponor Radiant Floor Heating Installation Handbook for additional information. Follow all CPVC instructions and guidelines for proper CPVC connections.

## Related applications

- PEX-a Plumbing Systems
- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems
- AquaSAFE™ Fire Safety Systems

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517

---