

# Talones para tuberías

## Project information


|                                |                 |
|--------------------------------|-----------------|
| Job name:                      | Location:       |
| Engineer:                      | Fecha de envío: |
| Contractor:                    | Presentada por: |
| Manufacturer's representative: | Approved by:    |

## Technical data

Material Plastic

## Product information and application use

Tube Talon secures 3/8", 1/2", 5/8", 3/4" and 1" Uponor crosslinked polyethylene (PEX) tubing products. Fasteners are included.

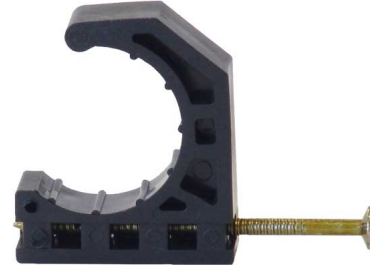

| Part name                                   | Part no. | A [inch] | B [inch] | C [inch] | Subcomponent Material            | Weight per UOM [lbs/UOM] |
|---|----------|----------|----------|----------|----------------------------------|--------------------------|
| Tube Talon (3/8" PEX), 100/pkg.             | F7050375 | 1.575    | 0.957    | 0.354    | Polypropylene (PP)               | 0.01                     |
| Tube Talon (1/2", 5/8", 3/4" PEX), 100/pkg. | F7050750 | 2.217    | 1.551    | 0.4      | High-density polyethylene (HDPE) | 0.01                     |
| Tube Talon (1" PEX), 50/pkg.                | F7051000 | 2.806    | 1.622    | 0.535    | Polypropylene (PP)               | 0.02                     |

## Installation

Mount the tube talon over the tubing and mounting surface. Attach the tube talon to desired surface with the nail provided. Refer to the Uponor Radiant Floor Installation Handbook or the Uponor Professional Plumbing Installation Guide for additional information.

## Related applications

- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems
- PEX-a Plumbing Systems

## Footnotes

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517