

# Válvulas para equipos para fabricar hielo de bronce sin plomo (LF) ProPEX (de direccionamiento recto)



## Project Information

Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:


## Technical data

End type 1	ProPEX 1/2"
End type 2	Compression 1/4"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

## Product information and application use

Uponor ProPEX® Lead-free (LF) Brass Ice Maker Valve connects 1/2" Uponor AquaPEX® tubing to 1/4" O.D. compression with quarter-turn and shut-off capability.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

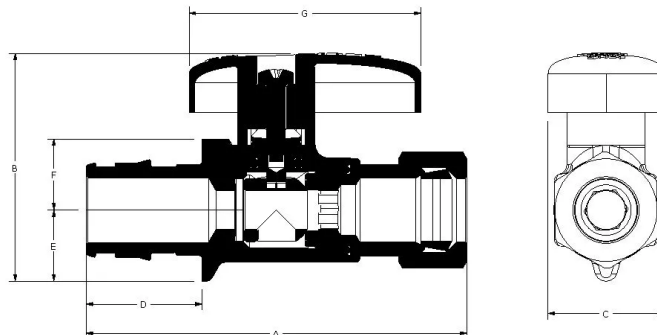

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Weight per UOM [lbs/UOM]
ProPEX LF Brass Ice Maker Valve, 1/2" PEX x 1/4" O.D. (straight)	LF4786025	2.444	1.622	1.137	0.709	0.493	0.493	1.313	0.35

Part name	Part no.	Codes	Standards	Listings
Válvulas para equipos para fabricar hielo de bronce sin plomo (LF) ProPEX (de direccionamiento recto)	LF4786025	UPC IPC NPC of Canada NSPC	ASTM F1960 CSA B125 CSA B137.5 NSF/ANSI/CAN 61 ASME A112.18.1 ASTM F877 NSF/ANSI/CAN 372	cCSAus

## Installation

Install valves according to local building code. Do not dismantle. Refer to the Uponor Professional Plumbing Installation Guide for additional information.

## Related applications

PEX-a Plumbing Systems

## Footnotes

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517