

# Colector comercial de acero inoxidable, piezas de repuesto y recambio




## Project Information

Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

## Product information and application use

Spare and replacement parts for Uponor Commercial stainless-steel manifold assemblies.

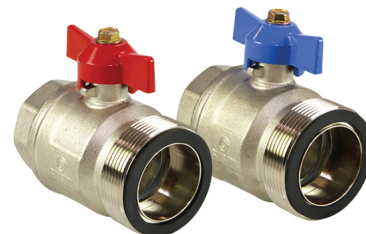

Part name	Part no.	A [Inch]	B [Inch]	C [Inch]	Material group	Prop 65 label required?	Operating temperature min. [°F]	Operating temperature max. [°F]	Weight per UOM [lbs/UOM]
Commercial Stainless-steel Manifold Flow Meter, 0-4 gpm	A2791004	4.197	1.417	1.309	Brass	Yes	-	-	0.53
Commercial Stainless-steel Manifold Loop Isolation Ball Valve	A2791010	2.402	2.241	1.358	Brass	Yes	-	-	0.6
Commercial Stainless-steel Manifold 2" Flat Gasket, replacement part	A2791032	2.205	2.205	0.118	Rubber	Yes	-	-	0
Commercial Stainless-steel Manifold Temperature Gauge	A2791050	2.5	2.5	0.767	Aluminum	-	32	176	0.53
Commercial Stainless-steel Manifold Mounting Clips, Supply	A2791501	5.512	2.825	0.787	Metal	-	-	-	0.38
Commercial Stainless-steel Manifold Mounting Clips, Return	A2791502	5.512	4.203	0.787	Metal	-	-	-	0.48
Commercial Stainless-steel Manifold Ball Valve, Supply and Return, set of 2	A2791532	3.74	3.923	2.559	Brass	Yes	-	-	3.53

Part name	Part no.	Codes	Standards	Listings
Colector comercial de acero inoxidable, piezas de repuesto y recambio	All	-	-	-
In addition, the following parts have additional codes, standards, or listings:				
Commercial Stainless-steel Manifold Flow Meter, 0-4 gpm	A2791004		R25: ISO 228-G 1"	
Commercial Stainless-steel Manifold Loop Isolation Ball Valve	A2791010		R25: ISO 228-G 1"	
Commercial Stainless-steel Manifold Ball Valve, Supply and Return, set of 2	A2791532		ISO 228 G2	

## Installation

## Related applications

-

-

## Footnotes

## Contact information

-

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517