

Ensembles TruFLOW Classic avec vannes d'équilibrage et d'isolement




Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Brass
Manifold size	1.25 inch
Loop Cv	1.9 Cv
End type 1	ISO 228-G 1-1/4"
End type 2	ISO 228-G 3/4"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Max. fluid flow rate	21 gpm
Prop 65 label required?	Yes

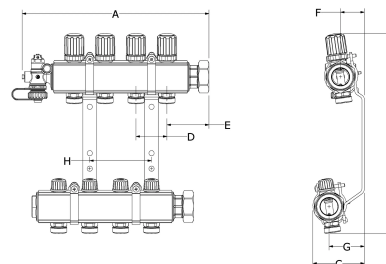

Informations sur le produit et utilisation de l'application

The Uponor TruFLOW™ Classic Manifold system comes fully assembled. The manifold is mounted on a durable bracket with an end cap on the supply manifold and an end cap with vent and drain on the return manifold. R32 unions on the inlet side of the manifolds allow connections to any manifold adapters offered by Uponor. Flow balancing is controlled through manifold adjustments to the balancing valve on the supply manifold.

Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	Weight per UOM [lbs/UOM]
TruFLOW Classic Assembly, B&I, 2-loop	A2610200	7.961	12.612	3.281	1.969	2.677	1.523	2.251	1.92	7.94
TruFLOW Classic Assembly, B&I, 5-loop	A2610500	13.866	12.612	3.281	1.969	2.677	1.523	2.251	5.906	13.7
TruFLOW Classic Assembly, B&I, 7-loop	A2610700	17.803	12.612	3.281	1.969	2.677	1.523	2.251	9.843	19.19
TruFLOW Classic Assembly, B&I, 8-loop	A2610800	19.772	12.612	3.281	1.969	2.677	1.523	2.251	11.811	20.81
TruFLOW Classic Assembly, B&I, 10-loop	A2611000	23.709	12.612	3.281	1.969	2.677	1.523	2.251	15.748	22.85
TruFLOW Classic Assembly, B&I, 6-loop	A2610600	15.835	12.612	3.281	1.969	2.677	1.523	2.251	7.874	17.23

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Ensembles TruFLOW Classic avec vannes d'équilibrage et d'isolement	All	IMC IRC NBC of Canada UMC	CSA B137.5 R32: ISO 228-G 1 1/4" ASTM F877 R20: ISO 228-G 3/4"	cNSFus-rfh

L'installation

TruFLOW Classic manifolds are completely assembled and ready for installation right out of the box. Use the TruFLOW Balancing Hex Key (A2620002) on the internal balancing valves of the supply manifold. Manifold is shipped with the appropriate number of TruFLOW Manifold Actuator Adapters (A2630028). Refer to the TruFLOW Classic Manifold Instruction Sheet for further information.

Applications connexes

Radiant Heating and Cooling Systems
Permafrost Prevention Systems
Turf Conditioning Systems

Remarques :

Manifold loop threaded connections:
ISO 228-G 3/4" (R20)

Notes de bas de page

Coordonnées de la personne-ressource

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517