

# Ensembles TruFLOW Classic avec vannes d'équilibrage et d'isolement




## Renseignements sur le projet

|                             |                     |
|-----------------------------|---------------------|
| Nom du poste :              | Lieu :              |
| Ingénieur :                 | Date de soumission: |
| Entrepreneur :              | Présentée par:      |
| Représentant du fabricant : | Approuvé par :      |

## Données techniques

|                         |  |
|-------------------------|--|
| Material                | Brass  |
| Manifold size           | 1.25 inch  |
| Loop Cv                 | 1.9 Cv   |
| End type 1              | ISO 228-G 1-1/4"   |
| End type 2              | ISO 228-G 3/4"   |
| Temp/pressure ratings   | 73 °F (23 °C) at 160 psi (11 bar)<br>180 °F (82 °C) at 100 psi (6.9 bar)<br>200 °F (93 °C) at 80 psi (5.5 bar) |
| Max. fluid flow rate    | 21 gpm   |
| Prop 65 label required? | Yes  |

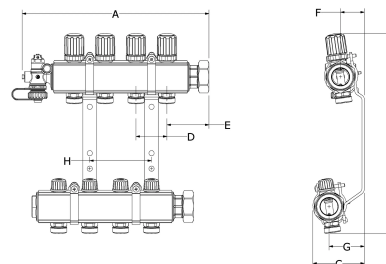

## Informations sur le produit et utilisation de l'application

The Uponor TruFLOW™ Classic Manifold system comes fully assembled. The manifold is mounted on a durable bracket with an end cap on the supply manifold and an end cap with vent and drain on the return manifold. R32 unions on the inlet side of the manifolds allow connections to any manifold adapters offered by Uponor. Flow balancing is controlled through manifold adjustments to the balancing valve on the supply manifold.

| Nom de la pièce                        | Numéro de pièce | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | H [inch] | Weight per UOM [lbs/UOM] |
|--|-----------------|----------|----------|----------|----------|----------|----------|----------|----------|--------------------------|
| TruFLOW Classic Assembly, B&I, 2-loop  | A2610200        | 7.961    | 12.612   | 3.281    | 1.969    | 2.677    | 1.523    | 2.251    | 1.92     | 7.94                     |
| TruFLOW Classic Assembly, B&I, 5-loop  | A2610500        | 13.866   | 12.612   | 3.281    | 1.969    | 2.677    | 1.523    | 2.251    | 5.906    | 13.7                     |
| TruFLOW Classic Assembly, B&I, 7-loop  | A2610700        | 17.803   | 12.612   | 3.281    | 1.969    | 2.677    | 1.523    | 2.251    | 9.843    | 19.19                    |
| TruFLOW Classic Assembly, B&I, 8-loop  | A2610800        | 19.772   | 12.612   | 3.281    | 1.969    | 2.677    | 1.523    | 2.251    | 11.811   | 20.81                    |
| TruFLOW Classic Assembly, B&I, 10-loop | A2611000        | 23.709   | 12.612   | 3.281    | 1.969    | 2.677    | 1.523    | 2.251    | 15.748   | 22.85                    |
| TruFLOW Classic Assembly, B&I, 6-loop  | A2610600        | 15.835   | 12.612   | 3.281    | 1.969    | 2.677    | 1.523    | 2.251    | 7.874    | 17.23                    |

| Nom de la pièce  | Numéro de pièce | Les codes                 | Normes   | Annonces   |
|--|-----------------|---------------------------|--|------------|
| Ensembles TruFLOW Classic avec vannes d'équilibrage et d'isolement | All             | IMC IRC NBC of Canada UMC | CSA B137.5 R32: ISO 228-G 1 1/4" ASTM F877 R20: ISO 228-G 3/4" | cNSFus-rfh |

## L'installation

TruFLOW Classic manifolds are completely assembled and ready for installation right out of the box. Use the TruFLOW Balancing Hex Key (A2620002) on the internal balancing valves of the supply manifold. Manifold is shipped with the appropriate number of TruFLOW Manifold Actuator Adapters (A2630028). Refer to the TruFLOW Classic Manifold Instruction Sheet for further information.

## Applications connexes

Radiant Heating and Cooling Systems  
Permafrost Prevention Systems  
Turf Conditioning Systems

## Remarques :

Manifold loop threaded connections:  
ISO 228-G 3/4" (R20)

## Notes de bas de page

## Coordonnées de la personne-ressource

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517