

Ensembles TruFLOW Jr. avec vannes d'équilibrage et collecteurs sans vanne




Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Brass
Manifold size	1 inch
Loop Cv	1.9 Cv
End type 1	ISO 228-G 1-1/4"
End type 2	ISO 228-G 3/4"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Max. fluid flow rate	14 gpm
Prop 65 label required?	Yes

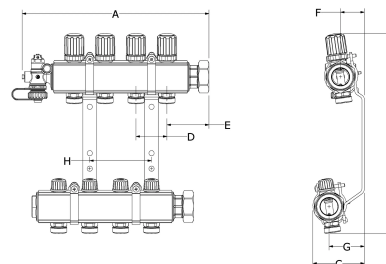

Informations sur le produit et utilisation de l'application

The TruFLOW™ Jr. Assembly with Balancing Valves and Valveless is fully assembled and ready for installation. Use the TruFLOW Balancing Hex Key on the internal balancing valves of the supply manifold to balance the loops across the manifold. The manifold body ends have R32 unions, and the loop outlets have R20 male threads.

Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	Weight per UOM [lbs/UOM]
H-Insulation Kit, 5.5", 6.9", 7.9	A2660200	7.185	11.237	2.919	1.969	1.989	1.285	2.013	1.85	5.2
TruFLOW Jr. Assembly, Balancing Valves and Valveless, 3-loop	A2660300	9.154	11.237	2.919	1.969	1.989	1.285	2.013	1.969	5.16
TruFLOW Jr. Assembly, Balancing Valves and Valveless, 5-loop	A2660500	13.091	11.237	2.919	1.969	1.989	1.285	2.013	5.906	9.97
TruFLOW Jr. Assembly, Balancing Valves and Valveless, 6-loop	A2660600	15.059	11.237	2.919	1.969	1.989	1.285	2.013	7.875	12.8
TruFLOW Jr. Assembly, Balancing Valves and Valveless, 7-loop	A2660700	17.028	11.237	2.919	1.969	1.989	1.285	2.013	9.843	14.1
TruFLOW Jr. Assembly, Balancing Valves and Valveless, 8-loop	A2660800	18.996	11.237	2.919	1.969	1.989	1.285	2.013	11.811	15.2

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Ensembles TruFLOW Jr. avec vannes d'équilibrage et collecteurs sans vanne	All	IMC IRC NBC of Canada UMC	CSA B137.5 R32: ISO 228-G 1 1/4" ASTM F877 R20: ISO 228-G 3/4"	cNSFus-rfh

L'installation

TruFLOW Jr. Manifolds are fully assembled ready for installation. The TruFLOW Balancing Hex Key is used on the internal balancing valves of the supply manifold. Refer to the Uponor TruFLOW Jr. Manifold Instruction Sheet for further information.

Applications connexes

- Radiant Heating and Cooling Systems
- Permafrost Prevention Systems
- Turf Conditioning Systems

Remarques :

Manifold body threaded connections: R32
Manifold loop threaded connections: R20

Notes de bas de page

Coordonnées de la personne-ressource

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517