

Ensembles TruFLOW Jr. avec vannes d'équilibrage et d'isolement




Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Brass
Manifold size	1 inch
Loop Cv	1.9 Cv
End type 1	ISO 228-G 1-1/4"
End type 2	ISO 228-G 3/4"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Max. fluid flow rate	14 gpm
Prop 65 label required?	Yes

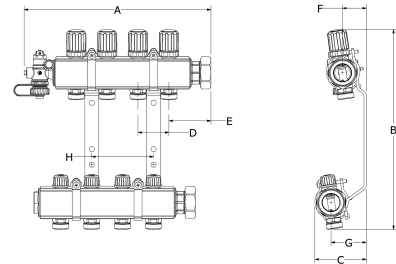

Informations sur le produit et utilisation de l'application

The TruFLOW™ Jr. Assembly with Balancing and Isolation Valves comes fully assembled and ready for installation. Use the TruFLOW Balancing Hex Key on the internal balancing valves of the supply manifold to balance the loops across the manifold. The TruFLOW Jr. Manifold with Isolation Valves allows quick isolation of the loop by turning the black cap on the top of the manifold. For multiple zoning on the manifold, remove the black caps and replace with Uponor Thermal Actuators or Motorized Valve Actuators (MVAs). The manifold assembly is shipped with the appropriate number of TruFLOW Manifold Actuator Adapters. The manifold body ends have R32 unions and the loop outlets have R20 male threads.

Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	Weight per UOM [lbs/UOM]
PEX Foam Stapler Jam Door, replacement assembly	A2660301	9.154	12.214	2.9	1.969	1.989	1.285	2.013	1.969	7.86
PEX Foam Stapler Spring, replacement part	A2660401	11.122	12.214	2.9	1.969	1.988	1.285	2.013	3.937	9.95
PEX Foam Stapler Metal Stand, replacement assembly	A2660501	13.091	12.214	2.9	1.969	1.989	1.285	2.013	5.906	12.67
PEX Foam Stapler Shear Plate, replacement part	A2660601	15.059	12.215	2.9	1.969	1.989	1.285	2.013	7.874	14.76
TruFLOW Jr. Assembly, B&I, 7-loop	A2660701	17.028	12.214	2.9	1.969	1.989	1.285	2.013	9.843	16.84
TruFLOW Jr. Assembly, B&I, 8-loop	A2660801	18.996	12.214	2.9	1.969	1.989	1.285	2.013	11.811	18.93

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Ensembles TruFLOW Jr. avec vannes d'équilibrage et d'isolement	All	IMC IRC NBC of Canada UMC	CSA B137.5 R32: ISO 228-G 1 1/4" ASTM F877 R20: ISO 228-G 3/4"	cNSFus-rfh

L'installation	Applications connexes
TruFLOW Jr. Manifolds are fully assembled ready for installation. Use the TruFLOW Balancing Hex Key on the internal balancing valves of the supply manifold. The manifold is shipped with the appropriate number of actuator adapters (A2630028). Refer to the Uponor TruFLOW Jr. Manifold Instruction Sheet for further information.	Radiant Heating and Cooling Systems Permafrost Prevention Systems Turf Conditioning Systems

Remarques :
Manifold body threaded connections: R32 Manifold loop threaded connections: R20

Notes de bas de page	Coordonnées de la personne-ressource		
-	<table border="0"> <tr> <td>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</td> <td>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</td> </tr> </table>	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517		