

# Crochets pour tube

## Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

## Données techniques

Material Plastic

## Informations sur le produit et utilisation de l'application

Tube Talon secures 3/8", 1/2", 5/8", 3/4" and 1" Uponor crosslinked polyethylene (PEX) tubing products. Fasteners are included.

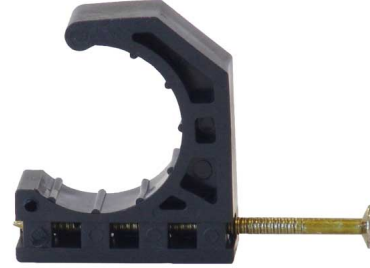

Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	Subcomponent Material	Weight per UOM [lbs/UOM]
Tube Talon (3/8" PEX), 100/pkg.	F7050375	1.575	0.957	0.354	Polypropylene (PP)	0.01
Tube Talon (1/2", 5/8", 3/4" PEX), 100/pkg.	F7050750	2.217	1.551	0.4	High-density polyethylene (HDPE)	0.01
Tube Talon (1" PEX), 50/pkg.	F7051000	2.806	1.622	0.535	Polypropylene (PP)	0.02

## L'installation

Mount the tube talon over the tubing and mounting surface. Attach the tube talon to desired surface with the nail provided. Refer to the Uponor Radiant Floor Installation Handbook or the Uponor Professional Plumbing Installation Guide for additional information.

## Applications connexes

- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems
- PEX-a Plumbing Systems

## Notes de bas de page

## Coordonnées de la personne-ressource

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517