

# Valves ProPEX pour machine à glaçons en laiton sans plomb (LF) (en angle)



## Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :


## Données techniques

End type 1	ProPEX 1/2"
End type 2	Compression 1/4"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

## Informations sur le produit et utilisation de l'application

Uponor ProPEX® Lead-free (LF) Brass Ice Maker Valve connects 1/2" Uponor AquaPEX® tubing to 1/4" O.D. compression with quarter-turn and shut-off capability.1

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

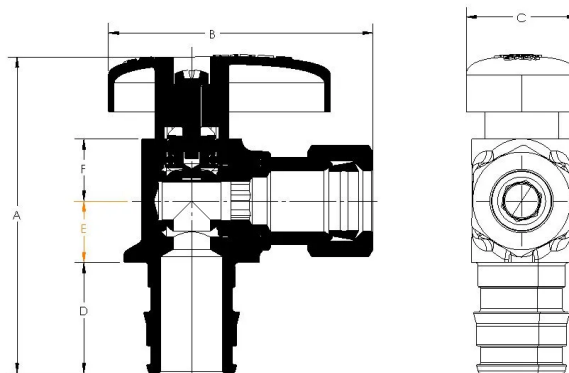

Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	Weight per UOM [lbs/UOM]
ProPEX LF Brass Ice Maker Valve, 1/2" PEX x 1/4" O.D. (angle)	LF4785025	2.146	2.044	0.8	0.709	0.4	0.4	0.3

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Valves ProPEX pour machine à glaçons en laiton sans plomb (LF) (en angle)	LF4785025	UPC IPC NPC of Canada NSPC	ASTM F1960 CSA B125 CSA B137.5 NSF/ANSI/CAN 61 ASME A112.18.1 NSF/ANSI/CAN 372 ASTM F877	cCSAus

## L'installation

Install valves according to local building code. Do not dismantle. Refer to the Uponor Professional Plumbing Installation Guide for additional information.

## Applications connexes

PEX-a Plumbing Systems

## Notes de bas de page

## Coordonnées de la personne-ressource

-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
---	---	---