

Tés multivoies ouverts en EP

Renseignements sur le projet

| | |
|-----------------------------|---------------------|
| Nom du poste : | Lieu : |
| Ingénieur : | Date de soumission: |
| Entrepreneur : | Présentée par: |
| Représentant du fabricant : | Approuvé par : |


Données techniques

| | |
|-----------------------|--|
| Material | Engineered Polymer |
| End type 3 | ProPEX 1/2" |
| Temp/pressure ratings | 73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar) |

Informations sur le produit et utilisation de l'application

Engineered polymer (EP) flow-through multi-port tees feature 3/4" or 1" ProPEX® inlets with 1/2" ProPEX branch outlets. The tees are made of EP, a high-performance material used in demanding, hot-water applications

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

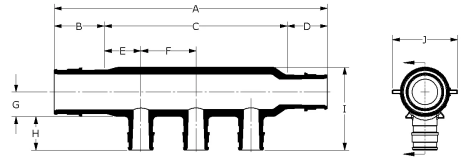

| Nom de la pièce | Numéro de pièce | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | H [inch] | I [inch] | J [inch] |
|--|-----------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| EP Flow-through Multi-port Tee, 2 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2227557 | 4.41 | 0.955 | 2.5 | 0.955 | 0.625 | 1.25 | 0.54 | 0.719 | 1.696 | 1.22 |
| EP Flow-through Multi-port Tee, 3 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2237557 | 5.79 | 0.955 | 3.88 | 0.955 | 0.69 | 1.25 | 0.54 | 0.719 | 1.696 | 1.22 |
| EP Flow-through Multi-port Tee, 3 (1/2") outlets, 1" x 3/4" ProPEX | Q2231057 | 6.196 | 1.191 | 4.05 | 0.955 | 0.775 | 1.25 | 0.6 | 0.719 | 1.879 | 1.48 |
| EP Flow-through Multi-port Tee, 4 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2247557 | 7.795 | 0.955 | 5.885 | 0.955 | 0.693 | 1.5 | 0.448 | 0.719 | 1.766 | 1.199 |
| EP Flow-through Multi-port Tee, 4 (1/2") outlets, 1" x 3/4" ProPEX | Q2241057 | 7.146 | 1.191 | 5 | 0.955 | 0.625 | 1.25 | 0.57 | 0.719 | 2.009 | 1.441 |
| EP Flow-through Multi-port Tee, 6 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2267557 | 9.41 | 0.955 | 7.5 | 0.955 | 0.625 | 1.25 | 0.457 | 0.719 | 1.624 | 1.18 |
| EP Flow-through Multi-port Tee, 6 (1/2") outlets, 1" x 3/4" ProPEX | Q2261057 | 9.646 | 1.191 | 7.5 | 0.955 | 0.625 | 1.25 | 0.57 | 0.719 | 2.009 | 1.441 |
| EP Flow-through Multi-port Tee, 6 (1/2") outlets, 1" x 1" ProPEX | Q2261051 | 9.882 | 1.191 | 7.5 | 1.191 | 0.625 | 1.25 | 0.57 | 0.719 | 2.009 | 1.441 |
| EP Flow-through Multi-port Tee, 4 (1/2") outlets, 1" x 1" ProPEX | Q2241051 | 7.682 | 1.191 | 5.3 | 1.191 | 0.775 | 1.25 | 0.6 | 0.719 | 1.879 | 1.48 |

| Nom de la pièce | Numéro de pièce | Cv Through | Equivalent length through [ft] | End Type 1 | End Type 2 | End Type 4 | Weight per UOM [lbs/UOM] |
|--|-----------------|------------|--------------------------------|-------------|-------------|------------|--------------------------|
| EP Flow-through Multi-port Tee, 2 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2227557 | 15.3 | - | ProPEX 3/4" | ProPEX 3/4" | - | - |
| EP Flow-through Multi-port Tee, 3 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2237557 | 14.2 | - | ProPEX 3/4" | ProPEX 3/4" | ProPEX | - |
| EP Flow-through Multi-port Tee, 3 (1/2") outlets, 1" x 3/4" ProPEX | Q2231057 | 11.6 | - | ProPEX 1" | ProPEX 3/4" | - | 0.13 |
| EP Flow-through Multi-port Tee, 4 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2247557 | 13.8 | 0 | ProPEX 3/4" | ProPEX 3/4" | ProPEX | 0 |
| EP Flow-through Multi-port Tee, 4 (1/2") outlets, 1" x 3/4" ProPEX | Q2241057 | 11.7 | - | ProPEX 1" | ProPEX 3/4" | - | - |
| EP Flow-through Multi-port Tee, 6 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2267557 | 13.2 | 0 | ProPEX 3/4" | ProPEX 3/4" | - | 0 |
| EP Flow-through Multi-port Tee, 6 (1/2") outlets, 1" x 3/4" ProPEX | Q2261057 | 11.8 | - | ProPEX 1" | ProPEX 3/4" | - | - |
| EP Flow-through Multi-port Tee, 6 (1/2") outlets, 1" x 1" ProPEX | Q2261051 | 25.1 | 0 | ProPEX 1" | ProPEX 1" | - | 0 |

| Nom de la pièce | Numéro de pièce | Les codes | Normes | Annonces |
|------------------------------|-----------------|---|---|---|
| Tés multivoies ouverts en EP | All | UPC IBC IRC IPC NPC of Canada UMC NSPC IMC | ASTM E814 ULC S115 ASTM F877 ASTM F1960 CSA B137.5 ULC S102.2 ASTM E119 UL 263 NSF/ANSI/CAN 61 ULC S101 NSF/ANSI 14 | IAPMO-ES HUD MR 1269 ICC-ES- PMG cNSFus- pw UL U.P.Code cQAlus P321 |

| L'installation | Applications connexes |
|---|------------------------|
| For a mounting bracket, use any product designed to mount 1" copper pipe for the ¾" EP flow-through multi-port tees or 1¼" copper pipe for the 1" EP flow-through multi-port tees. For more information, refer to the Uponor Piping Systems Installation Guide. | PEX-a Plumbing Systems |

| Notes de bas de page | Coordonnées de la personne-ressource | |
|----------------------|---|---|
| - | Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008 | Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517 |