

Tés multivoies à embranchements en EP avec orifices opposés



Renseignements sur le projet

| | |
|-----------------------------|---------------------|
| Nom du poste : | Lieu : |
| Ingénieur : | Date de soumission: |
| Entrepreneur : | Présentée par: |
| Représentant du fabricant : | Approuvé par : |


Données techniques

| | |
|-------------------------|--|
| Material | Engineered Polymer |
| End type 1 | ProPEX 3/4" |
| End type 2 | ProPEX 1/2" |
| End type 3 | ProPEX 1/2" |
| End type 4 | ProPEX 1/2" |
| Temp/pressure ratings | 73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar) |
| Prop 65 label required? | No |

Informations sur le produit et utilisation de l'application

Engineered polymer (EP) branch opposing-port multi-port tees feature a 3/4" ProPEX® inlet with opposing 1/2" ProPEX branch outlets.1 These are designed for a central location to facilitate piping in two directions.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

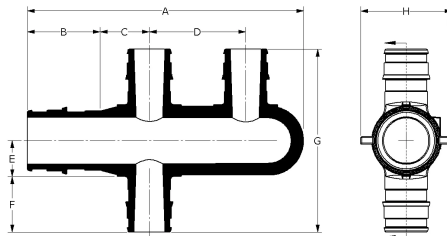

| Nom de la pièce | Numéro de pièce | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | H [inch] | Weight per UOM [lbs/UOM] |
|---|-----------------|----------|----------|----------|----------|----------|----------|----------|----------|--------------------------|
| 3/4" EP Branch Opposing-port Multi-port Tee, 3 (1/2") outlets | Q2337550 | 0.141 | 0.955 | 0.625 | 1.25 | 0.467 | 0.719 | 2.373 | 1.18 | 0.07 |
| 3/4" EP Branch Opposing-port Multi-port Tee, 4 (1/2") outlets | Q2347550 | 3.58 | 0.955 | 0.625 | 1.25 | 0.467 | 0.719 | 2.373 | 1.18 | 0.07 |

| Nom de la pièce | Numéro de pièce | Les codes | Normes | Annonces |
|---|-----------------|--|---|---|
| Tés multivoies à embranchements en EP avec orifices opposés | All | UPC IBC IRC IPC NPC of Canada UMC NSPC IMC | ASTM E814 ULC S115 ASTM F877 ASTM F1960 CSA B137.5 ULC S102.2 ASTM E119 UL 263 NSF/ANSI/CAN 61 ULC S101 NSF/ANSI 14 | IAPMO-ES HUD MR 1269 ICC-ES-PMG cNSFus-pw UL U.P.Code cQAIus P321 |

L'installation

Use any product designed to mount 1" copper pipe as a mounting bracket. For more information, refer to the Uponor Piping Systems Installation Guide.

Applications connexes

PEX-a Plumbing Systems

Notes de bas de page

Coordonnées de la personne-ressource

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517