

# Adaptateurs filetés mâles ProPEX en EP

## Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :


## Données techniques

Material	Engineered Polymer
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)

## Informations sur le produit et utilisation de l'application

The ProPEX® engineered polymer (EP) male threaded adapter combines durable polymer material with the reliable ASTM F1960 connection professionals have come to depend on for a solution that stands the test of time.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

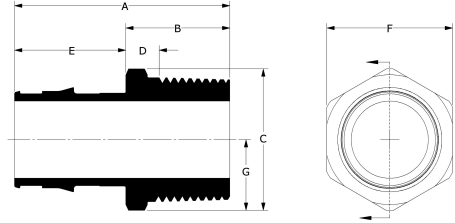

Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Cv	End Type 1	End Type 2
ProPEX EP Male Threaded Adapter, 1/2" PEX x 1/2" NPT	Q4625050	1.826	1.1	0.95	0.358	0.726	0.86	0.475	5	ProPEX 1/2"	MNPT 1/2"
ProPEX EP Male Threaded Adapter, 3/4" PEX x 3/4" NPT	Q4627575	2.062	1.1	1.18	0.358	0.962	1.06	0.59	11.3	ProPEX 3/4"	MNPT 3/4"
ProPEX EP Male Threaded Adapter, 1" PEX x 1" NPT	Q4621010	2.5	1.3	1.47	0.422	1.2	1.325	0.735	19.9	ProPEX 1"	MNPT 1"

Nom de la pièce	Numéro de pièce	Weight per UOM [lbs/UOM]
ProPEX EP Male Threaded Adapter, 1/2" PEX x 1/2" NPT	Q4625050	0.02
ProPEX EP Male Threaded Adapter, 3/4" PEX x 3/4" NPT	Q4627575	0.03
ProPEX EP Male Threaded Adapter, 1" PEX x 1" NPT	Q4621010	0.06

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Adaptateurs filetés mâles ProPEX en EP	All	UPC IRC IPC NPC of Canada	ASTM F1960 CSA B137.5 NSF/ANSI/CAN 61 NSF/ANSI 14 NSF/ANSI/CAN 372 ASTM F877	U.P.Code cNSFus-pw

L'installation	Applications connexes
Use a minimum of three wraps of PTFE thread-seal tape. If using thread-sealant paste in addition to tape, consult the paste manufacturer for compatibility with polymer fittings. To avoid cross-threading, turn the fitting counterclockwise against the female threads until the threads drop into place. Then, tighten accordingly	PEX-a Plumbing Systems Plumbing Systems Pre-Insulated Pipe Systems

Notes de bas de page	Coordonnées de la personne-ressource		
-	<table border="0"> <tr> <td>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</td> <td>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</td> </tr> </table>	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517		