

# Tés ProPEX en EP avec orifices opposés

## Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :


## Données techniques

Material	Engineered Polymer
End type 3	ProPEX 3/4"
End type 4	ProPEX 3/4"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)

## Informations sur le produit et utilisation de l'application

ProPEX® engineered polymer (EP) opposing-port tees feature 1" through 2" ProPEX flow-through connections with opposing 3/4" ProPEX branch outlets. 1

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

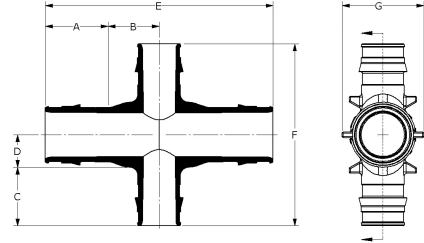

Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Cv Through	Equivalent length branch [ft]	Equivalent length through [ft]
ProPEX EP Opposing-port Tee 1" x 1" x 3/4" x 3/4	Q4801075	1.191	0.875	0.955	0.7	4.132	3.31	1.48	34.1	5.53	0.86
ProPEX EP Opposing-port Tee 1 1/4" x 1 1/4" x 3/4" x 3/4	Q4801375	1.455	0.9	0.955	0.75	4.71	3.41	1.82	57.1	5.29	0.83
ProPEX EP Opposing-port Tee 1 1/2" x 1 1/2" x 3/4" x 3/4	Q4801575	1.714	1	0.955	0.9	5.428	3.71	2.07	69.3	5.34	1.39
ProPEX EP Opposing-port Tee 2" x 2" x 3/4" x 3/4	Q4802075	2.157	1.05	0.955	1.04	6.414	3.99	2.82	130	5.2	1.44

Nom de la pièce	Numéro de pièce	Cv Branch	End Type 1	End Type 2	Weight per UOM [lbs/UOM]
ProPEX EP Opposing-port Tee 1" x 1" x 3/4" x 3/4	Q4801075	8.9	ProPEX 1"	ProPEX 1"	0.09
ProPEX EP Opposing-port Tee 1 1/4" x 1 1/4" x 3/4" x 3/4	Q4801375	9.1	ProPEX 1-1/4"	ProPEX 1-1/4"	0.12
ProPEX EP Opposing-port Tee 1 1/2" x 1 1/2" x 3/4" x 3/4	Q4801575	9	ProPEX 1-1/2"	ProPEX 1-1/2"	0.17
ProPEX EP Opposing-port Tee 2" x 2" x 3/4" x 3/4	Q4802075	9.1	ProPEX 2"	ProPEX 2"	1.32

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annexes
Tés ProPEX en EP avec orifices opposés	All	IMC UPC IBC IRC IPC NPC of Canada UMC NSPC	ASTM F1960 ASTM E119/UL 263 ASTM E84 ASTM E814/ULC S115 ASTM F877 CSA B137.5 ULC S102.2 NSF/ANSI/CAN 61 ULC S101 NSF/ANSI 14	IAPMO-ES ICC-ES-PMG cNSFus-pw UL U.P.Code cQAIus P321 HUD MR 1269

L'installation	Applications connexes
Use the appropriate ProPEX ring for PEX piping. Refer to the Uponor Piping Pocket Guide or the Uponor Hydronic Piping Design Assistance Manual (HPDAM) for additional information.	Hydronic Radiant Heating and Cooling Systems

Notes de bas de page	Coordonnées de la personne-ressource		
-	<table border="0"> <tr> <td>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</td> <td>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</td> </tr> </table>	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517		