




## Flexible Pipe Systems



# Uponor Aqua Pipe



Uponor Aqua Pipe is manufactured from highest quality cross-linked polyethylene and is designed for tap water application as well as distribution pipes.

## Your benefits

- Certified quality
- Corrosion resistant
- Thermal memory
- Lightweight and very flexible
- Durable



## Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

## Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Leakage free tap water installations with possibility to exchange pipes in case of damage


## Certification

- WaterMark Certified to AS/NZS 2537.2:2011 Mechanical jointing fittings for use with crosslinked polyethylene (PE-X) for pressure applications Part 2: Plastics piping systems for hot and cold-water installations– Crosslinked polyethylene (PE-X)– Fittings (ISO 15875-3:2003, MOD).
- AS 2492:2007 Cross-Linked polyethylene (PE-X) for pressure applications.




## Uponor Aqua Pipe opaque PN20

- Coils



Item no.	Dimension	L m	do mm	s mm	p bar	colour	Qty 2	Qty 1	UOM
<b>1126786</b>	16x2,2	100m	100	16	2,2	10 white	1100	100	m
<b>1126787</b>	20x2,8	50m	50	20	2,8	10 white	550	50	m
<b>1126788</b>	25x3,5	50m	50	25	3,5	10 white	400	50	m

## Uponor Aqua Pipe natural in conduit black



Item no.	Dimension	L m	di1 mm	do mm	do1 mm	s mm	p bar	colour	Qty 2	Qty 1	UOM
<b>1008993</b>	16x2,2 25/20	50m	50	20	16	25	2,2	10 black	550	50	m
<b>1008994</b>	20x2,8 28/23	50m	50	23	20	28	2,8	10 black	400	50	m

# Uponor Aqua Pipe

## Uponor Aqua pipes insulated, coils, PN20


### Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene
- Insulation made of expanded grey closed cell PE-foam with external protective film of extruded polyethylene-LD, CFC free, fire resistance class B1 acc. to DIN EN 13501-1
- Thermal conductivity  $\lambda = 0.040$  W/mK, permeability = <1%, diffusion of water vapor 10000  $\mu$ .

### Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Leakage free tap water installations with possibility to exchange pipes in case of damage

## Uponor Aqua pipes insulated, coils, PN20



Item no.	Dimension	L m	do mm	do1 mm	s1 mm	p bar	colour	Qty 2	Qty 1	UOM
<b>1020240</b>	20x2,8 31x6 50m	50	20	41	2,8	10	grey	450	50	m

# Uponor Q&E



Uponor Q&E is a unique and innovative fittings system that uses the shrink-back effect of cross-linked polyethylene PE-Xa pipes for quick and easy installation. A wide range of fittings and accessories makes Q&E a

complete and secure system for cost-effective installation. Corrosion resistance makes it safe, secure and watertight.

## Your benefits

- Elasticity of PE-Xa pipes for high safety
- Corrosion resistant
- Low pressure loss
- Ergonomic design of ring
- Easy identification of ring dimension



## Specification

- Q&E fittings and rings for Uponor Pex pipes
- Metal fittings are made of high quality brass
- Plastic fittings are made of polyphenylsulphone
- Q&E rings must be ordered separately if not different mentioned

## Application

if not different mentioned:

- Male and female threads acc.to EN 10226-1.
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Leakage free tap water installations with possibility to exchange pipes in case of damage.

## Certification

- WaterMark Certified to AS/NZS 2537.2:2011 Mechanical jointing fittings for use with crosslinked polyethylene (PE-X) for pressure applications Part 2: Plastics piping systems for hot and cold-water installations– Crosslinked polyethylene (PE-X)– Fittings (ISO 15875-3:2003, MOD).
- AS 2492:2007 Cross-Linked polyethylene (PE-X) for pressure applications.




## Uponor Q&E evolution ring

- Conical inner shape
- With stop edge
- PE material



Item no.	Dimension	l mm	di mm	do mm	z mm	p bar	colour	Qty 2	Qty 1	UOM
1057453	16	16	16,2	25,3	1	10	white	900	20	pce
1057454	20	20	20,2	29,2	1	10	white	520	20	pce
1057455	25	25	25,3	34,6	1	10	white	300	20	pce




Item no.	Dimension	l mm	di mm	do mm	z mm	p bar	colour	Qty 2	Qty 1	UOM
1058010	16	16	16,2	25,3	1	10	red	900	20	pce
1058011	20	20	20,2	29,2	1	10	red	520	20	pce
1058012	25	25	25,3	34,6	1	10	red	300	20	pce



Item no.	Dimension	l mm	di mm	do mm	z mm	p bar	colour	Qty 2	Qty 1	UOM
1058013	16	16	16,2	25,3	1	10	blue	900	20	pce
1058014	20	20	20,2	29,2	1	10	blue	520	20	pce
1058015	25	25	25,3	34,6	1	10	blue	300	20	pce


# Uponor Q&E

## Uponor Q&E adapter male thread PPSU




Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1008661	16-G $\frac{1}{2}$ "MI	42	16	18	$\frac{1}{2}$	8	10	90	5	pce
1008662	20-G $\frac{1}{2}$ "MI	46	16	22	$\frac{1}{2}$	8	10	80	5	pce
1008663	20-G $\frac{3}{4}$ "MI	48	18	22	$\frac{3}{4}$	8	10	60	5	pce
1008664	25-G $\frac{3}{4}$ "MI	54	18	28	$\frac{3}{4}$	8	10	50	5	pce
1008665	25-G1"MI	58	23	28	1	8	10	40	5	pce

## Uponor Q&E adapter female thread PPSU




Item no.	Dimension	l	l1	l2	Rp	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1042329	16-Rp $\frac{1}{2}$ "FI	42	17	18	$\frac{1}{2}$	7	10	80	5	pce
1042330	20-Rp $\frac{1}{2}$ "FI	45	17	22	$\frac{1}{2}$	6	10	60	5	pce
1042331	20-Rp $\frac{3}{4}$ "FI	47	18	22	$\frac{3}{4}$	7	10	50	5	pce
1042332	25-Rp $\frac{3}{4}$ "FI	52	18	28	$\frac{3}{4}$	6	10	40	5	pce

## Uponor Q&E adapter swivel nut PPSU




Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1038021	16-G $\frac{1}{2}$ "SN	35	8	18	$\frac{1}{2}$	9	10	50	1	pce
1038022	20-G $\frac{1}{2}$ "SN	47	9	22	$\frac{1}{2}$	16	10	40	1	pce
1038023	20-G $\frac{3}{4}$ "SN	39	8	22	$\frac{3}{4}$	9	10	30	1	pce
1038024	25-G $\frac{3}{4}$ "SN	53	8	28	$\frac{3}{4}$	17	10	25	1	pce
1038025	25-G1"SN	46	10	27	1	9	10	25	1	pce

## Uponor Q&E coupling PPSU



Item no.	Dimension	l	l1	l2	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	bar			
1008669	16-16	39	18	18	3	10	100	5	pce
1008932	20-20	47	22	22	3	10	80	5	pce
1008671	25-25	58	28	28	3	10	50	5	pce


## Uponor Q&E reducer PPSU



Item no.	Dimension	l	l1	l2	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	bar			
1008674	20-16	43	22	18	3	10	100	5	pce
1008675	25-16	49	28	18	3	10	40	5	pce
1008676	25-20	53	22	28	3	10	40	5	pce


# Uponor Q&E

## Uponor Q&E elbow adapter male thread PPSU




Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1008666</b>	16-G $\frac{1}{2}$ "MI	31	34	$\frac{1}{2}$	15	16	10	80	5	pce
<b>1008667</b>	20-G $\frac{1}{2}$ "MI	31	38	$\frac{1}{2}$	15	16	10	60	5	pce
<b>1008668</b>	25-G $\frac{3}{4}$ "MI	36	42	$\frac{3}{4}$	18	15	10	40	5	pce

## Uponor Q&E elbow adapter female thread PPSU




Item no.	Dimension	l1 mm	l2 mm	Rp inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1042334</b>	16-Rp $\frac{1}{2}$ "FI	27	33	$\frac{1}{2}$	10	15	10	50	5	pce
<b>1042335</b>	20-Rp $\frac{1}{2}$ "FI	27	38	$\frac{1}{2}$	9	16	10	50	5	pce
<b>1042336</b>	20-Rp $\frac{3}{4}$ "FI	30	41	$\frac{3}{4}$	12	19	10	40	5	pce
<b>1042337</b>	25-Rp $\frac{3}{4}$ "FI	32	47	$\frac{3}{4}$	14	19	10	35	5	pce

## Uponor Smart Aqua tap elbow Q&E PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	k mm	p bar	Qty 2	Qty 1	UOM
<b>1042342</b>	16-Rp $\frac{1}{2}$ " l=43mm	34	17	27	$\frac{1}{2}$	16	10	36	10	40	5	pce
<b>1042343</b>	20-Rp $\frac{1}{2}$ " l=43mm	38	17	27	$\frac{1}{2}$	16	10	36	10	30	5	pce


## Uponor Smart Aqua tap elbow long Q&E PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	k mm	p bar	Qty 2	Qty 1	UOM
<b>1042344</b>	16-Rp $\frac{1}{2}$ " l=49mm	34	165	33	$\frac{1}{2}$	16	16	36	10	35	5	pce


# Uponor Q&E

## Uponor Q&E elbow adapter swivel nut PPSU




Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1038037</b>	16-G $\frac{1}{2}$ "SN	36	27	$\frac{1}{2}$	28	9	10	40	1	pce
<b>1038038</b>	20-G $\frac{1}{2}$ "SN	38	31	$\frac{1}{2}$	30	10	10	35	1	pce
<b>1038039</b>	20-G $\frac{3}{4}$ "SN	38	34	$\frac{3}{4}$	29	12	10	25	1	pce

## Uponor Q&E elbow PPSU




Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1008679</b>	16-16	27	32	9	13	10	100	5	pce
<b>1008680</b>	20-20	34	39	12	16	10	40	5	pce
<b>1008681</b>	25-25	42	47	14	19	10	25	5	pce

## Uponor Q&E tee adapter female thread PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	z3 mm	p bar	Qty 2	Qty 1	UOM
<b>1042338</b>	16-Rp $\frac{1}{2}$ "FI-16	33	28	33	$\frac{1}{2}$	15	10	15	10	50	5	pce
<b>1042339</b>	20-Rp $\frac{1}{2}$ "FI-20	38	27	38	$\frac{1}{2}$	16	10	16	10	40	5	pce
<b>1042340</b>	25-Rp $\frac{1}{2}$ "FI-25	43	30	43	$\frac{1}{2}$	15	13	15	10	25	5	pce
<b>1042341</b>	25-Rp $\frac{3}{4}$ "FI-25	47	31	47	$\frac{3}{4}$	19	13	19	10	25	5	pce


## Uponor Q&E tee PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	p bar	Qty 2	Qty 1	UOM
<b>1008684</b>	16-16-16	32	27	32	14	10	14	10	60	5	pce
<b>1008685</b>	20-20-20	39	34	39	17	12	17	10	30	5	pce
<b>1008686</b>	25-25-25	47	42	47	20	15	20	10	20	5	pce


# Uponor Q&E

## Uponor Q&E tee reducer PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	p bar	Qty 2	Qty 1	UOM
1008710	16-20-16	35	33	35	17	11	17	10	40	5	pce
1008700	20-16-16	36	29	32	14	11	14	10	40	5	pce
1008689	20-16-20	36	29	36	14	11	14	10	40	5	pce
1008697	20-20-16	36	34	32	14	12	14	10	40	5	pce
1008711	20-25-20	42	40	42	20	12	20	10	25	5	pce
1008702	25-16-16	41	32	32	14	14	14	10	25	5	pce
1008699	25-16-20	41	32	36	14	14	14	10	25	5	pce
1008690	25-16-25	41	32	41	14	14	14	10	25	5	pce
1008701	25-20-16	44	37	35	17	15	17	10	25	5	pce
1008703	25-20-20	44	37	39	17	15	17	10	25	5	pce
1008691	25-20-25	44	37	44	17	15	17	10	20	5	pce
1001420	25-25-20	47	42	42	20	15	20	10	20	5	pce


## Uponor Q&E stop end



Item no.	Dimension	l mm	l1 mm	z1 mm	Qty 2	Qty 1	UOM
1084671	16	23	20	4	200	20	pce


## Uponor Q&E manifold PPSU

- Main connection for Q&E 25 mm

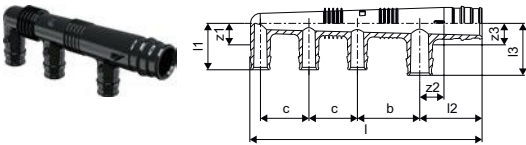

Item no.	Dimension	outlets	l mm	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	b mm	b1 mm	p bar	Qty 2	Qty 1	UOM
1008718	25, 3X16 c/c45+35	3	133	34	45	34	16	18	16	45	35	10	15	1	pce
1008719	25 4X16 c/c45+2X35	4	168	34	45	34	16	18	16	45	35	10	15	1	pce

## Uponor Q&E manifold male thread PPSU

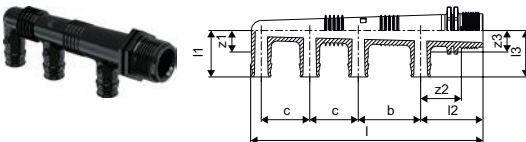

Item no.	Dimension	outlets	l mm	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	b mm	b1 mm	p bar	Qty 2	Qty 1	UOM
1008714	G $\frac{3}{4}$ "MI 3X16 c/c45+35mm	3	133	34	45	34	16	29	16	45	35	10	10	1	pce
1008715	G $\frac{3}{4}$ "MI 4X16 c/c45+2X35mm	4	168	34	45	34	16	29	16	45	35	10	10	1	pce
1008716	G $\frac{3}{4}$ "MI 1X20+2X16 c/c45+35mm	3	133	34	45	38	16	29	16	45	35	10	10	1	pce
1008717	G $\frac{3}{4}$ "MI 1X20+3X16 c/c45+2X35mm	4	168	34	45	38	16	29	16	45	35	10	10	1	pce



# Uponor Q&E

## Uponor Q&E Lead-Free DR-brass coupling

### Specification

- Made of DR brass. Male thread acc.to DIN EN 10226-1 and AS2537.
- Q&E rings must be ordered separately if not different mentioned


### Application

- For tap water installations

if not different mentioned:


- Male and female threads acc.to EN 10226-1 and AS2537.

## Uponor Q&E DR Brass adapter male tapered thread LF




Item no.	Dimension	l	l1	l2	R	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
<b>1126814</b>	16-R $\frac{1}{2}$ "MT	41	12	18	$\frac{1}{2}$	12	10	100	5	pce
<b>1126815</b>	16-R $\frac{3}{4}$ "MT	43	13	18	$\frac{3}{4}$	12	10	80	5	pce
<b>1126816</b>	20-R $\frac{1}{2}$ "MT	45	12	22	$\frac{1}{2}$	12	10	100	5	pce
<b>1126817</b>	20-R $\frac{3}{4}$ "MT	47	13	22	$\frac{3}{4}$	12	10	70	5	pce
<b>1126818</b>	20-R1"MT	48	15	22	1	12	10	70	5	pce
<b>1126819</b>	25-R $\frac{3}{4}$ "MT	52	13	27	$\frac{3}{4}$	12	10	70	5	pce
<b>1126820</b>	25-R1"MT	53	15	27	1	12	10	40	5	pce

## Uponor Q&E DR Brass adapter female thread LF



Item no.	Dimension	l	l1	l2	Rp	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
<b>1126809</b>	16-Rp $\frac{1}{2}$ "FT	39	15	18	$\frac{1}{2}$	6	10	60	5	pce
<b>1126810</b>	20-Rp $\frac{1}{2}$ "FT	43	15	22	$\frac{1}{2}$	6	10	60	5	pce
<b>1126811</b>	20-Rp $\frac{3}{4}$ "FT	44	17	22	$\frac{3}{4}$	5	10	40	5	pce
<b>1126812</b>	20-Rp1"FT	49	22	22	1	5	10	40	5	pce
<b>1126813</b>	25-Rp1"FT	54	22	27	1	5	10	35	5	pce

## Uponor Q&E DR-Brass adapter swivel nut LF



Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
<b>1126821</b>	16-G $\frac{1}{2}$ "SN	36	8	18	$\frac{1}{2}$	10	10	100	5	pce
<b>1126822</b>	20-G $\frac{1}{2}$ "SN	47	8	22	$\frac{1}{2}$	17	10	60	5	pce
<b>1126823</b>	20-G $\frac{3}{4}$ "SN	41	9	22	$\frac{3}{4}$	10	10	50	5	pce
<b>1126824</b>	25-G $\frac{3}{4}$ "SN	53	9	27	$\frac{3}{4}$	17	10	60	5	pce
<b>1126825</b>	25-G1"SN	49	11	27	1	11	10	50	5	pce

# Uponor Q&E

## Uponor Q&E DR-Brass coupling LF



Item no.	Dimension	d mm	d1 mm	p bar	Qty 2	Qty 1	UOM
<b>1126789</b>	16-16	16	16	10	100	5	pce
<b>1126790</b>	20-20	20	20	10	80	5	pce
<b>1126791</b>	25-25	25	25	10	40	5	pce

## Uponor Q&E DR-Brass coupling with reducer LF




Item no.	Dimension	d mm	d1 mm	p bar	Qty 2	Qty 1	UOM
<b>1126792</b>	16-20	16	20	10	100	5	pce
<b>1126793</b>	16-25	16	25	10	80	5	pce
<b>1126794</b>	20-25	20	25	10	40	5	pce

## Uponor Q&E DR-Brass elbow adapter male thread LF




Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1126831</b>	16-G½"MT	27	32	½	14	14	10	80	5	pce
<b>1123832</b>	20-G½"MT	30	40	½	17	18	10	50	5	pce
<b>1123833</b>	20-R½"MT	30	40	½	17	18	10	200	5	pce
<b>1123834</b>	20-G¾"MT	31	40	¾	17	18	10	40	5	pce
<b>1126871</b>	25-G¾"MT	37	46	¾	20	19	10	40	5	pce



## Uponor Q&E DR-Brass elbow adapter female thread LF




Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1126835</b>	16-G½"FT	29	32	½	11	14	10	200	5	pce
<b>1126836</b>	20-G¾"FT	36	39	¾	17	17	10	200	5	pce
<b>1126837</b>	25-G¾"FT	39	46	¾	20	19	10	100	5	pce



## Uponor Q&E DR-Brass elbow adapter swivel nut LF



Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1126826</b>	16-G½"SN	36	33	½	28	15	10	70	5	pce
<b>1126827</b>	20-G½"SN	36	33	½	28	11	10	50	5	pce



# Uponor Q&E

## Uponor Smart Aqua

### Specification

- Elbows for tap connection and
- Q&E rings must be ordered separately if not different mentioned

### Application


- For tap water installations

if not different mentioned:

- Male and female threads acc.to EN 10226-1.


## Uponor Smart Aqua U-tap elbow Q&E

- U elbow for loop installation



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	b mm	k mm	Qty 2	Qty 1	UOM
<b>1059820*</b>	16-Rp $\frac{1}{2}$ "FT-16	52	20	20	$\frac{1}{2}$	34	5	45	40	5	1	pce
<b>1059821*</b>	20-Rp $\frac{1}{2}$ "FT-20	56	20	20	$\frac{1}{2}$	35	5	45	40	5	1	pce

## Uponor Smart Aqua tap elbow Q&E LF



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1126828</b>	16- $\frac{1}{2}$ "	37	15	26	$\frac{1}{2}$	19	5	10	150	5	pce
<b>1126869</b>	20- $\frac{1}{2}$ "	41	15	26	$\frac{1}{2}$	19	5	10	100	5	pce
<b>1126830</b>	20- $\frac{3}{4}$ "	44	15	27	$\frac{3}{4}$	22	5	10	100	5	pce

## Uponor Q&E DR-brass BP elbow LF



Item no.	Dimension	d mm	FT inch	p bar	l mm	Qty 2	Qty 1	UOM
<b>1126841</b>	16- $\frac{1}{2}$ "G MT	16	G $\frac{1}{2}$	10	65	100	5	pce
<b>1126842</b>	16- $\frac{1}{2}$ "G MT	16	G $\frac{1}{2}$	10	90	100	5	pce
<b>1126843</b>	16- $\frac{1}{2}$ "G MT	16	G $\frac{1}{2}$	10	175	50	5	pce
<b>1126844</b>	16- $\frac{1}{2}$ "G MT	16	G $\frac{1}{2}$	10	200	50	5	pce
<b>1126845</b>	20- $\frac{1}{2}$ "G MT	20	G $\frac{1}{2}$	10	95	80	5	pce
<b>1126846</b>	20- $\frac{3}{4}$ "G MT	20	G $\frac{3}{4}$	10	200	100	5	pce
<b>1126847</b>	20- $\frac{3}{4}$ "G MT	20	G $\frac{3}{4}$	10	100	50	5	pce

# Uponor Q&E

## Uponor Q&E DR-brass elbow 90 deg LF



Item no.	Dimension	d mm	d1 mm	p bar	Qty 2	Qty 1	UOM
<b>1126795</b>	16-16	16	16	10	250	5	pce
<b>1126796</b>	20-20	20	20	10	200	5	pce
<b>1126797</b>	25-25	25	25	10	100	5	pce

## Uponor Q&E DR-brass tee female LF



Item no.	Dimension	d mm	FT inch	d1 mm	p bar	Qty 2	Qty 1	UOM
<b>1126838</b>	25- $\frac{1}{2}$ -25	25	$\frac{1}{2}$	25	10	80	5	pce
<b>1126839</b>	25- $\frac{3}{4}$ -25	25	$\frac{3}{4}$	25	10	80	5	pce

## Uponor Q&E DR-brass tee equal LF



Item no.	Dimension	d mm	d1 mm	d2 mm	p bar	Qty 2	Qty 1	UOM
<b>1126798</b>	16-16-16	16	16	16	10	70	5	pce
<b>1126799</b>	20-20-20	20	20	20	10	35	5	pce
<b>1126800</b>	25-25-25	25	25	25	10	20	5	pce

## Uponor Q&E DR-Brass tee with reducer LF



Item no.	Dimension	d mm	d1 mm	d2 mm	p bar	Qty 2	Qty 1	UOM
<b>1126801</b>	16-20-16	16	20	16	10	40	5	pce
<b>1126802</b>	20-16-16	20	16	16	10	40	5	pce
<b>1126803</b>	20-16-20	20	16	20	10	40	5	pce
<b>1126804</b>	20-20-16	20	20	16	10	40	5	pce
<b>1126805</b>	25-16-25	25	16	25	10	40	5	pce
<b>1126806</b>	25-20-25	25	20	25	10	40	5	pce

# Uponor Q&E

## Uponor Q&E DR-Brass adapter LF



Item no.	Dimension	d mm	d1 inch	p bar	Qty 2	Qty 1	UOM
<b>1126848</b>	16-15cu (for soldering)	16	1/2	10	100	5	pce
<b>1126849</b>	20-15/22cu (for soldering)	20	1/2	10	100	5	pce
<b>1126850</b>	20-3/4"cu (for soldering)	20	3/4	10	100	5	pce
<b>1126851</b>	25-3/4"cu (for soldering)	20	3/4	10	100	5	pce

## Uponor Q&E DR-Brass CU-Press adapter LF




Item no.	Dimension	d mm	d1 inch	p bar	Qty 2	Qty 1	UOM
<b>1126852</b>	16-1/2"cu press	16	1/2	10	100	5	pce
<b>1126853</b>	20-3/4"cu press	20	1/2	10	100	5	pce
<b>1126850</b>	25-1"cu press	25	1	10	100	5	pce

## Uponor Q&E DR-Brass plugs LF



Item no.	Dimension	d mm	p bar	Qty 2	Qty 1	UOM
<b>1126807</b>	16	16	10	100	5	pce
<b>1126808</b>	20	20	10	80	5	pce

## Uponor Q&E DR-Brass adapter S-Press



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1062845</b>	16-Q&E16	47	22	18	8	20	1	pce
<b>1062846</b>	20-Q&E20	52	23	22	8	10	1	pce
<b>1062861</b>	25-Q&E25	65	31	27	8	10	1	pce



# uponor

**Uponor GmbH**

P.O. Box 1641  
97433 Hassfurt  
Germany

Australia

**T** +49-(0)9521 690 0  
**F** +49-(0)9521 690 750  
**E** [international@uponor.com](mailto:international@uponor.com)

**T** +61 (0)7 3202 6831  
**M** +61 (0)477 136 977  
**E** [international@uponor.com](mailto:international@uponor.com)

08/2023



[www.uponor.com](http://www.uponor.com)