
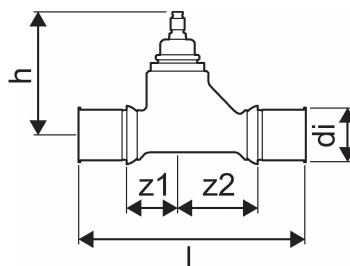


Uponor S-Press PLUS podžbukni ventil 20


1119322

- za zatvaranje ili potpuni protok vode
- priključak za ručku: zvjezdasti oblik (ručka nije uključena)
- radna temp.: max. 95 °C
- radni tlak: max. 10 bar
- za primjenu sa toplom i hladnom sanitarnom vodom
- odobrenja: DIN EN 1213, DVGW W 570-1
- tijelo ventila proizvedeno je iz mesinga CW625N
- O-brtva certificirana je prema DVGW W 270, KTW



Uponor S-Press PLUS podžbukni ventil 20

1119322

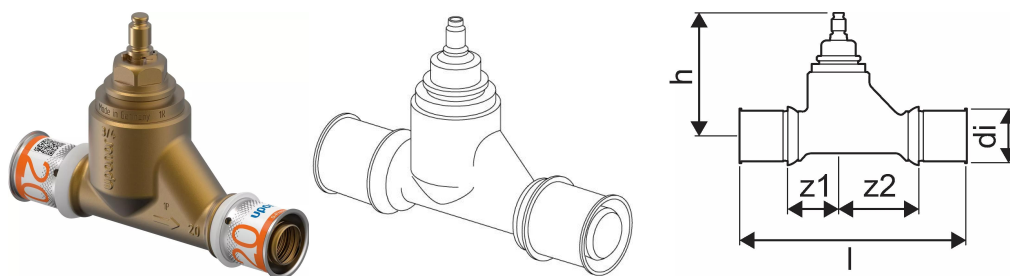

Tehnički podaci

Item no EAN	6414905560066
Item no GTIN	06414905560066
Artikal (mjerna jedinica)	kom.
Duljina (l)	109 mm
Z-mjera h	66 mm
z2	63 mm
Količina pakiranja 1	1
Količina pakiranja 4	5
Packaging GTIN PL1	06414905649792
Packaging GTIN PL2	06414905649808
Packaging GTIN PL4	06414905649815
Item Unit Length	109
Item Unit Height	78
Item Unit Weight	0,35
Item Unit Width	35

Uponor d.o.o.

Dubravkin trg 2/1
10 000, Zagreb
Hrvatska

T +385(0)16197158
E croatia@uponor.com

www.uponor.com/hr-hr