

Uponor Combi Port M-BaseX Rail+valves bottom x6, DN20, MT/FT

1095657

Bottom mounting rail including set of preinstalled ball valves for 6D execution of heat interface unit


Dimensioning codes:

x6 – quantity of ball valves included in set (6 pcs)

DN20 – ball valve size

MT – male thread connection

FT – female thread connection

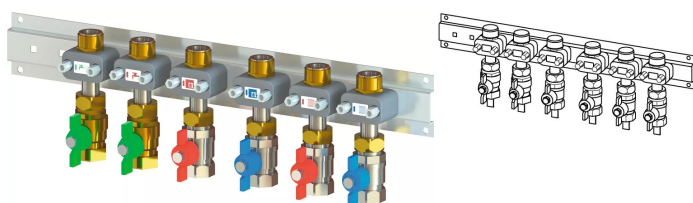

About Uponor Combi Port M-BaseX Rail+valves bottom

Specification

- port completely assembled and pressure tested
- DVGW certified PM Valve with patented triple-sealing technology
- pipe clamps made of plastic for sound protection and thermal decoupling
- 2 heat exchangers: for heating and domestic hot water
- secondary heating circulation pump with temperature control
- spacer for heat meter 110 mm x3/4"
- spacer for water meter 110 mm x3/4"
- fill and drain valve
- strainer for cold water 0,5 mm
- strainer for primary heating supply line 0,5 mm
- connection possibility (marked) of an electrical earthing lug
- max. operating pressure heating: PN10
- max. operating pressure sanitary: PN10
- max. operating temperature: 85 °C
- min. pressure primary sanitary: 2 bar
- max. differential pressure primary heating: 2,5 bar
- fitting material sanitary: CW617N
- fitting material heating: CW617N, CW614N
- pipe work: stainless steel 1.4401
- including cabinet cover, white powder coated (RAL 9016)

Application


- Decentralized instantaneous domestic hot water generation
- Underfloor heating systems
- Radiator heating systems

Certification

- DVGW approval

Uponor Combi Port M-BaseX Rail+valves bottom x6, DN20, MT/FT

1095657

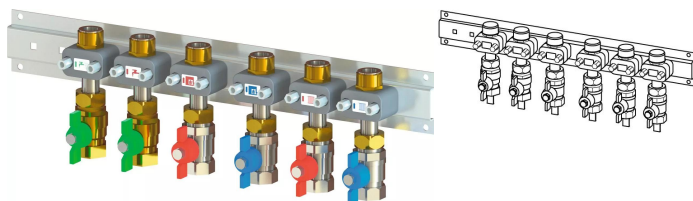

Technical data

Item no EAN	6414905478545
Item no GTIN	06414905478545
Item (unit of measurement)	pce
Length (l)	490 mm
Length (l1)	470 mm
Length (l2)	10 mm
Length (l3)	107 mm
Z-measurement h	130 mm
Z-measurement h1	64 mm
Z-measurement h2	52 mm
Z-measurement h3	6 mm
Z-measurement w	71 mm
Z-measurement w1	28 mm
Packaging Quantity 1	1
Packaging Quantity 4	50
Packaging GTIN PL1	06414905487240
Packaging GTIN PL4	06414905487257
Item Unit Length	555
Item Unit Height	100
Item Unit Weight	3,5
Item Unit Width	110

Technical documents

Download documents here

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb