

# ProPEX brass elbows

## Project Information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

## Technical data

Material	Brass
End type 1	ProPEX 5/8"
End type 2	ProPEX 5/8"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

## Product information and application use

Uponor 5/8" ProPEX® brass elbows are available for use in hydronic heating and cooling systems. The elbows are manufactured with the ProPEX fitting for connections to Uponor crosslinked polyethylene (PEX) tubing.

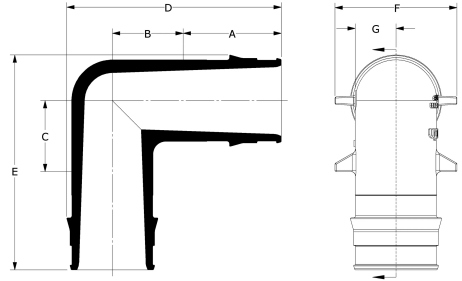

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Weight per UOM [lbs/UOM]
ProPEX Brass Elbow, 5/8" PEX x 5/8" PEX	Q4710625	0.866	0.625	0.35	1.865	1.591	1.04	0.35	0.13

Part name	Part no.	Codes	Standards	Listings
ProPEX brass elbows	Q4710625	IMC IBC IRC NPC of Canada UMC	ASTM F1960 CSA B137.5 NSF/ANSI 14 ASTM F877	IAPMO-ES ICC-ES-PMG cNSFus-rfh

## Installation

Use 5/8" ProPEX Ring with Stop (Q4690625) for connecting the tubing. Refer to the Uponor ProPEX Connections Instructional Guide for additional information.

## Related applications

- Radiant Heating and Cooling Systems
- Permafrost Prevention Systems
- Turf Conditioning Systems

## Footnotes

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517