


Uponor Ecoflex Thermo Twin 2x63x5,8/200

1018138

- Heating and Cooling
- Two medium pipes PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- PEX foam, HDPE casing

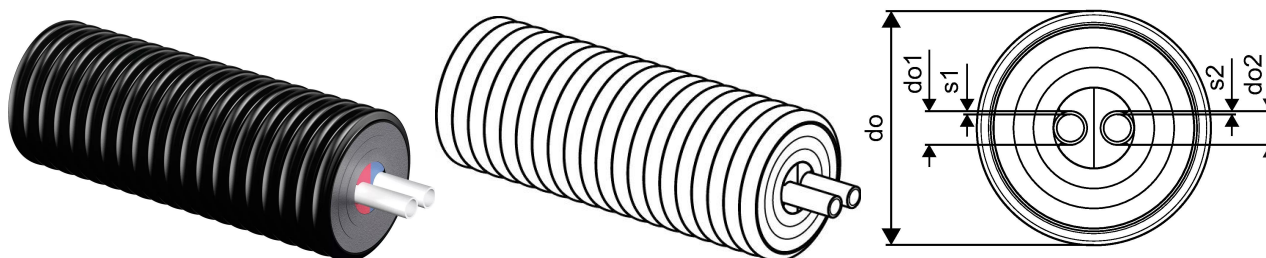

Application information Uponor Ecoflex Thermo Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) or PN 10 (SDR 7,4), Oxygen tightness based on EN 15632
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Thermo Twin 2x63x5,8/200

1018138

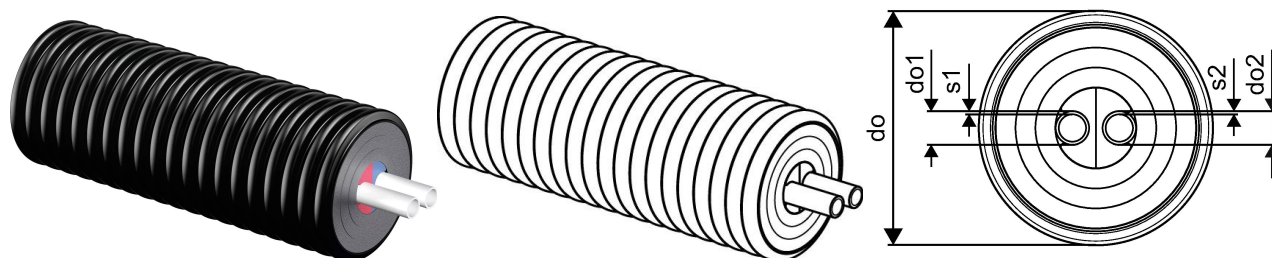

Technical data

Item no EAN	6414905210718
Item no GTIN	06414905210718
Item no VVS	087809063
RSK no.	2190424
Item no NRF	8360506
Item no LVI	3010227
Item (unit of measurement)	m
Bending radius 2	1,2 m
Packaging Quantity 1	100
Packaging GTIN PL1	06414905437405
Item Unit Length	1000
Item Unit Height	200
Item Unit Weight	4,55
Item Unit Width	200

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com