


Uponor Ecoflex Thermo Twin HP 2x40x3,7-2x32x3,5/175

1093895

- A to B or heat pump connection pipe, heating and cooling
- Two medium pipe PE-Xa with oxygen barrier, SDR 11
- Two cable conduits for power and data cables
- Max. load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- PEX foam, HDPE casing

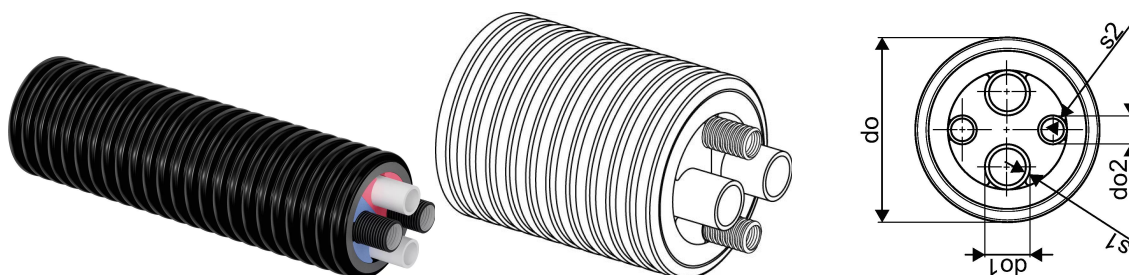

Application information Uponor Ecoflex Thermo Twin HP

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) or PN 10 (SDR 7,4), Oxygen tightness based on EN 15632
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Thermo Twin HP 2x40x3,7-2x32x3,5/175

1093895

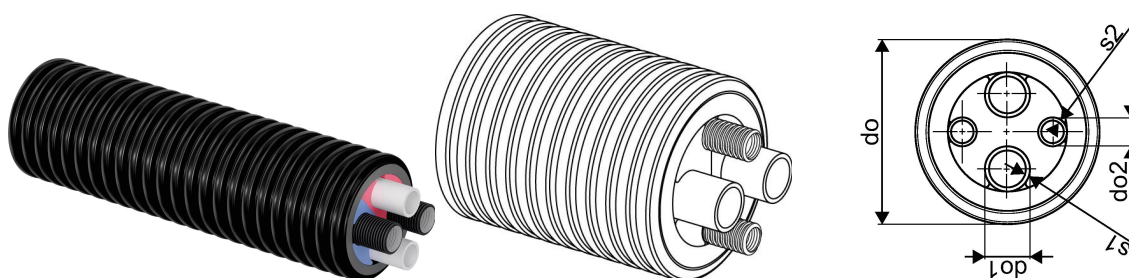

Technical data

Item no EAN	6414905231614
Item no GTIN	06414905231614
Item no VVS	087808133
RSK no.	2266307
Item no NRF	8360947
Item no LVI	3010126
Item (unit of measurement)	m
Bending radius 2	0,8 m
Packaging Quantity 1	200
Packaging GTIN PL1	06414905473519
Item Unit Length	1000
Item Unit Height	175
Item Unit Weight	2,605
Item Unit Width	175

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com