


Uponor Ecoflex Aqua Twin 32x4,4-25x3,5/175

1018140

- Warm tap water with circulation
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

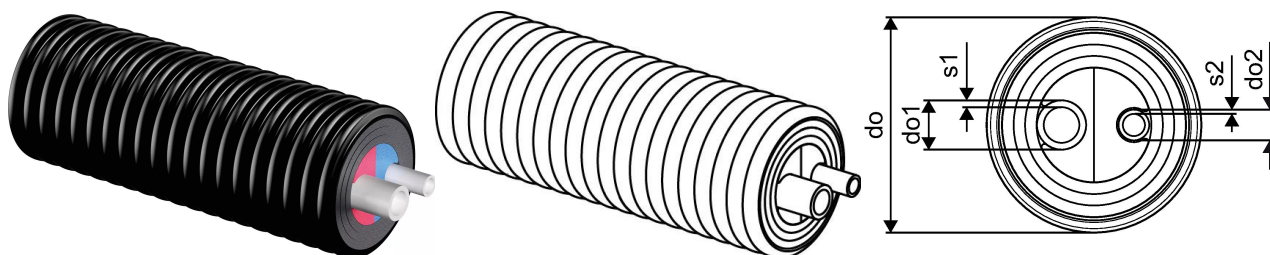

About Uponor Ecoflex Aqua Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

Uponor Ecoflex Aqua Twin 32x4,4-25x3,5/175

1018140

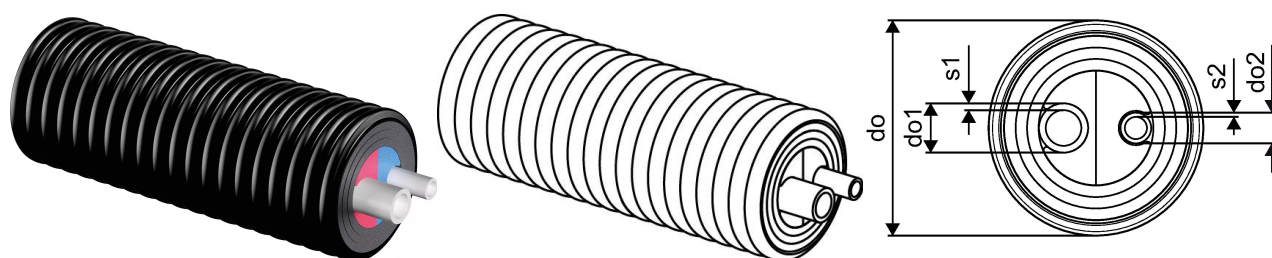

Technical data

Item no EAN	4021598111738
Item no GTIN	04021598111738
Item no VVS	087363832
Item no LVI	3010148
Item (unit of measurement)	m
Bending radius 2	0,7 m
Packaging Quantity 1	200
Packaging GTIN PL1	06414905437429
Item Unit Length	1000
Item Unit Height	175
Item Unit Weight	2,2
Item Unit Width	175

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb