


## Uponor RS tee RS2-RS2-RS2

**1029142**

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 3 lock pins.

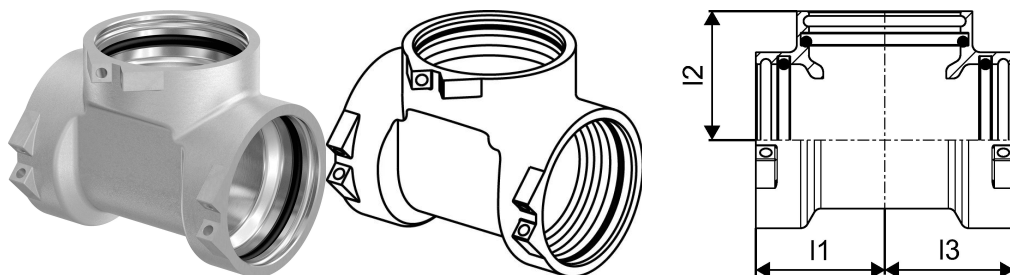

### About Uponor RS tee

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification

-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

-WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


-WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

## Uponor RS tee RS2-RS2-RS2

1029142

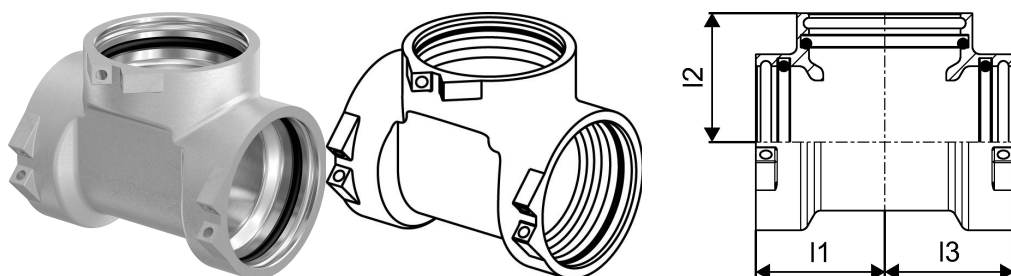

### Technical data

|                            |                |
|----------------------------|----------------|
| Item no EAN                | 4021598106796  |
| Item no GTIN               | 04021598106796 |
| Item no VVS                | 045455112      |
| RSK no.                    | 1808049        |
| Item no NRF                | 5071225        |
| Item no LVI                | 1720815        |
| Item (unit of measurement) | pce            |
| Length (l1)                | 51 mm          |
| Length (l2)                | 51 mm          |
| Length (l3)                | 51 mm          |
| Packaging Quantity 1       | 1              |
| Packaging Quantity 4       | 336            |
| Packaging GTIN PL1         | 06414905439492 |
| Packaging GTIN PL4         | 06414905491407 |
| Item Unit Length           | 101            |
| Item Unit Height           | 74             |
| Item Unit Weight           | 0,78           |
| Item Unit Width            | 88             |

### Technical documents

[Download documents here](#)

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)