


Uponor Combi Pipe opaque in conduit red 16x1,8 25/20 50m

1059179

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 2 - hot water supply
- Application class 4 - Underfloor heating and low temperature radiators
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1
- Conduits manufactured from high density polyethylene
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 90°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Leakage free installations with possibility to exchange pipes in case of damage

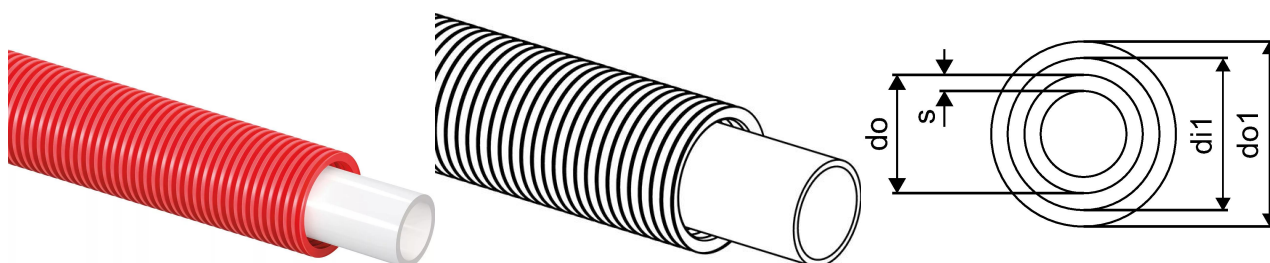

About Uponor Combi Pipe opaque in conduit red

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 2 - hot water supply
- Application class 4 - Underfloor heating and low temperature radiators
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 90°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Combi Pipe opaque in conduit red 16x1,8 25/20 50m

1059179

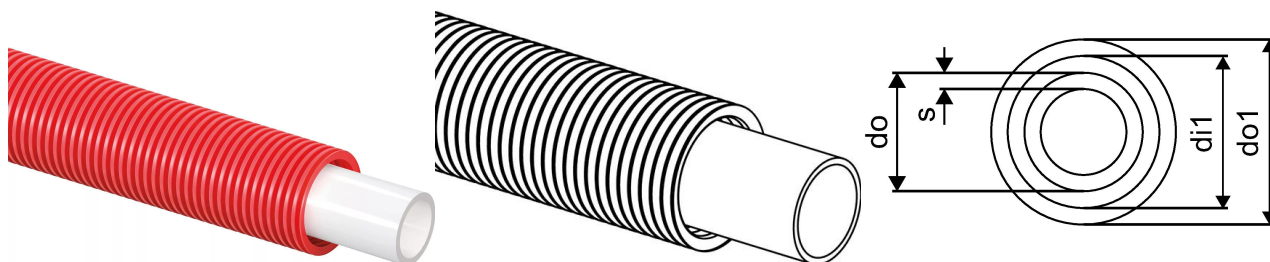

Technical data

| | |
|----------------------------|----------------|
| Item no EAN | 6414905514373 |
| Item no GTIN | 06414905514373 |
| Item (unit of measurement) | m |
| Packaging Quantity 1 | 50 |
| Packaging Quantity 4 | 550 |
| Packaging GTIN PL1 | 06414905410385 |
| Packaging GTIN PL4 | 06414905410392 |
| Item Unit Length | 1000 |
| Item Unit Height | 25 |
| Item Unit Weight | 0,18 |
| Item Unit Width | 25 |

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb