

Uponor Combi Port M-Pro HeatInterface RC 19 CB BP DT RL ZV

1093775

RC version for domestic hot water and direct heating with radiator connection (no mixing circuit).

Dimensioning codes:

15,19 – domestic hot water capacity indication (l/min)

CB – copper brazed stainless steel heat exchanger for domestic hot water preparation

St – free of non-ferrous metal brazed stainless steel heat exchanger for domestic hot water preparation

BP – supply lines preheating function

DI – primary differential pressure controller at the heat interface unit inlet


DT – differential pressure controller at the heat interface unit heat circuit for domestic hot water preparation

TL – thermostatic temperature limiter for domestic hot water with submersible sensor

RL – return temperature limiter for apartment heating circuit


ZM – circulation module for domestic hot water with safety valve, circulation pump, and differential pressure regulator. A waste water connection is needed.

ZV – zone valve in residential heating circuit return line without actuator

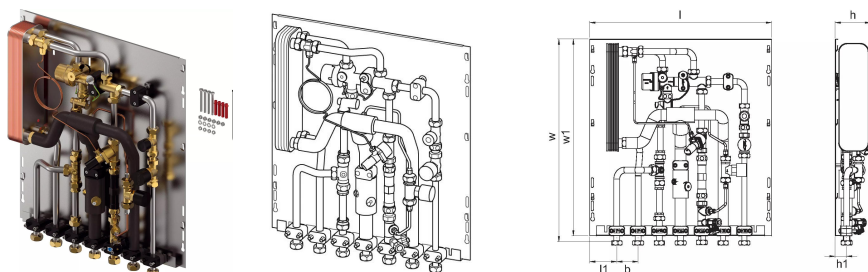

Uponor Combi Port M-Pro HeatInterface RC 19 CB BP DT RL ZV

1093775

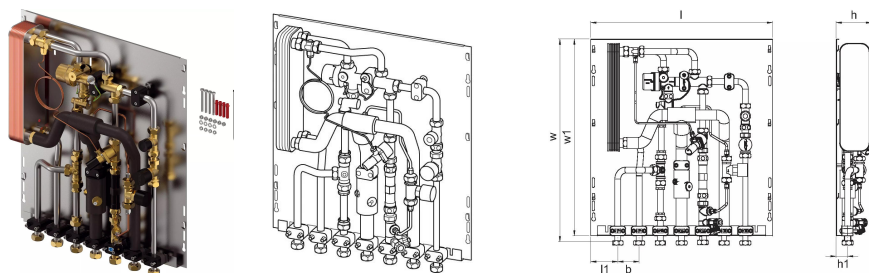

Technical data

Item no EAN	6414905230921
Item no GTIN	06414905230921
Item (unit of measurement)	pce
Length (l)	556 mm
Length (l1)	83 mm
Z-measurement b	65 mm
Z-measurement h	108 mm
Z-measurement h1	35 mm
Z-measurement w	618 mm
Z-measurement w1	600 mm
Packaging Quantity 1	1
Packaging GTIN PL1	06414905292257
Packaging GTIN PL4	06414905292844
Item Unit Length	600
Item Unit Height	110
Item Unit Weight	13
Item Unit Width	555

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb