
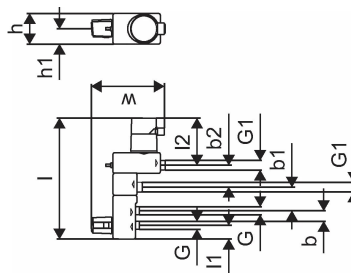


## Uponor Fluvia T pumpgroup Push-12 AC-G


**1095128**

- Integrated pump: Q: 0,1 - 0,4 m<sup>3</sup>/h, H: 0,2 - 1,1 m, Phyd< 1W
- Bracket for left- or right installation
- Air bleed screw
- Secondary circuit temp. range 20-50°C
- Balancing valve
- Secondary loop 3/4" eurocone
- Primary valves with clampconnection for CU-Pipe 15mm
- For control of UFH in small zones
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C
- Pumpgroup with actuator 230 V and cable room sensor
- Secondary max. temperature limiter by 50°C

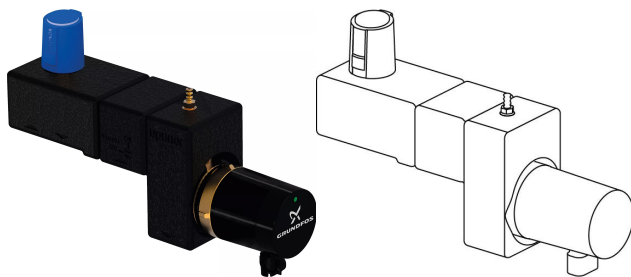

## Uponor Fluvia T pumpgroup Push-12 AC-G

1095128

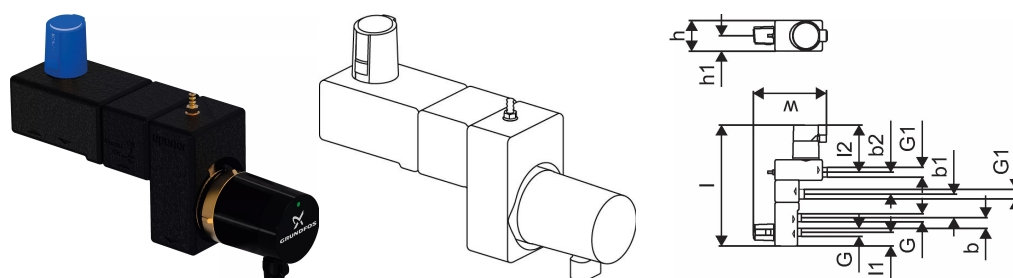

### Technical data

Item no EAN	6414905428212
Item no GTIN	06414905428212
Item no NRF	8361163
Item (unit of measurement)	pce
Length (l)	332 mm
Length (l1)	38 mm
Length (l2)	129 mm
Z-measurement b	40 mm
Z-measurement b1	65 mm
Z-measurement b2	60 mm
Z-measurement h	84 mm
Z-measurement h1	42 mm
Z-measurement w	202 mm
Packaging Quantity 1	1
Packaging Quantity 4	60
Packaging GTIN PL1	06414905475711
Packaging GTIN PL4	06414905475728
Item Unit Length	332
Item Unit Height	163
Item Unit Weight	2,43
Item Unit Width	84

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)