

ProPEX lead-free (LF) brass ice maker valves (straight)

Project Information

Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:


Technical data

End type 1	ProPEX 1/2"
End type 2	Compression 1/4"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

Product information and application use

Uponor ProPEX® Lead-free (LF) Brass Ice Maker Valve connects 1/2" Uponor AquaPEX® tubing to 1/4" O.D. compression with quarter-turn and shut-off capability.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

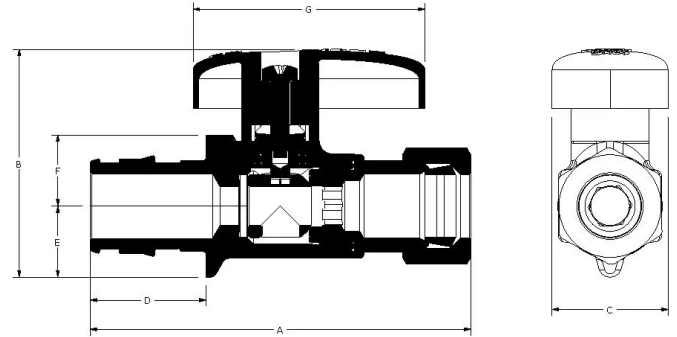

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Weight per UOM [lbs/UOM]
ProPEX LF Brass Ice Maker Valve, 1/2" PEX x 1/4" O.D. (straight)	LF4786025	2.444	1.622	1.137	0.709	0.493	0.493	1.313	0.35

Part name	Part no.	Codes	Standards	Listings
ProPEX lead-free (LF) brass ice maker valves (straight)	LF4786025	UPC IPC NPC of Canada NSPC	ASTM F1960 CSA B125 CSA B137.5 NSF/ANSI/CAN 61 ASME A112.18.1 ASTM F877 NSF/ANSI/CAN 372	cCSAus

Installation

Install valves according to local building code. Do not dismantle. Refer to the Uponor Professional Plumbing Installation Guide for additional information.

Related applications

PEX-a Plumbing Systems

Footnotes

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517