

# Conectores reductores de PP-RCT de Uponor (fusión de tope a toma)



## Project information


Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

## Technical data

Material	PP-RCT
End type 1	Butt 6"
End type 2	Socket 4"

## Product information and application use

Utilice los reductores de fusión a tope PP-RCT de Uponor con tubería mecánica PP-RCT de Uponor para transportar fluidos para calefacción y refrigeración hidrónica o aplicaciones industriales y con tubería potable PP-RCT de Uponor para transportar agua para aplicaciones de plomería potable.

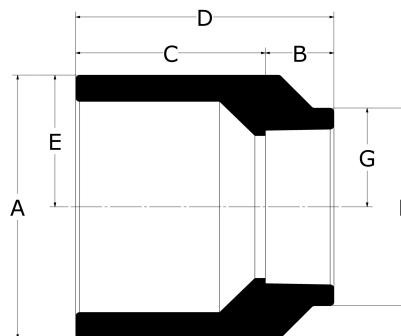

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Equivalent length through [ft]	Operating Temperature 1 [°F]	Operating Temperature 2 [°F]
Uponor PP-RCT Reducer, 6" x 4", SDR 9, Butt to Socket Fusion	PR94776040	6.299	1.575	1.772	3.346	3.15	6.528	3.264	9.5	73 °F (23 °C) at 265 psi (23 °C)	140 °F (60 °C) at 150 psi (60 °C)
Uponor PP-RCT Reducer, 6" x 4", SDR 11, Butt to Socket Fusion	PR114776040	6.299	1.575	1.772	3.346	3.15	6.528	3.264	10.7	73 °F (23 °C) at 215 psi (23 °C)	140 °F (60 °C) at 120 psi (60 °C)
Uponor PP-RCT Reducer, 6" x 4", SDR 17.6, Butt to Socket Fusion	PR174776040	6.299	1.575	1.772	3.346	3.15	6.528	3.264	11.6	73 °F (23 °C) at 130 psi (23 °C)	140 °F (60 °C) at 70 psi (60 °C)

Part name	Part no.	Operating Temperature 3 [°F]	Weight per UOM [lbs/UOM]
Uponor PP-RCT Reducer, 6" x 4", SDR 9, Butt to Socket Fusion	PR94776040	180 °F (82 °C) at 100 psi (82 °C)	1.6
Uponor PP-RCT Reducer, 6" x 4", SDR 11, Butt to Socket Fusion	PR114776040	180 °F (82 °C) at 80 psi (82 °C)	1.49
Uponor PP-RCT Reducer, 6" x 4", SDR 17.6, Butt to Socket Fusion	PR174776040	180 °F (82 °C) at 50 psi (82 °C)	1.39

Part name	Part no.	Codes	Standards	Listings
Conectores reductores de PP-RCT de Uponor (fusión de tope a toma)	All	CMC IMC UMC	NSF/ANSI/CAN 61 ASTM E84 NSF/ANSI 14 ASTM F2389 CSA B137.11	ICC-ES-PMG 1106 IAPMO-R&T 8358 QAI P321-5 IAPMO K-12775

## Installation

Utilice métodos de conexión aprobados de fusión a tope y fusión por encaje. Consulte el manual de PP-RCT de Uponor para obtener todos los detalles.

## Related applications

- Hydronic heating and cooling systems
- Industrial
- Domestic water systems

## Footnotes

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517