

# Tés multivoies à embranchements en EP avec orifices opposés




## Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

## Données techniques

Material	Engineered Polymer
End type 1	ProPEX 3/4"
End type 2	ProPEX 1/2"
End type 3	ProPEX 1/2"
End type 4	ProPEX 1/2"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	No

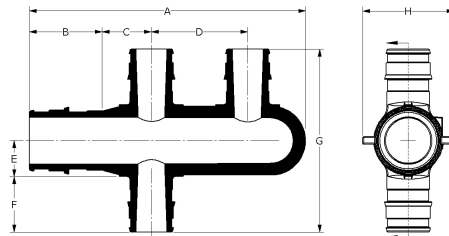

## Informations sur le produit et utilisation de l'application

Engineered polymer (EP) branch opposing-port multi-port tees feature a 3/4" ProPEX® inlet with opposing 1/2" ProPEX branch outlets.1 These are designed for a central location to facilitate piping in two directions.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	Weight per UOM [lbs/UOM]
3/4" EP Branch Opposing-port Multi-port Tee, 3 (1/2") outlets	Q2337550	0.141	0.955	0.625	1.25	0.467	0.719	2.373	1.18	0.07
3/4" EP Branch Opposing-port Multi-port Tee, 4 (1/2") outlets	Q2347550	3.58	0.955	0.625	1.25	0.467	0.719	2.373	1.18	0.07

Nom de la pièce	Numéro de pièce	Les codes	Normes	Annonces
Tés multivoies à embranchements en EP avec orifices opposés	All	UPC IBC IRC IPC NPC of Canada UMC NSPC IMC	ASTM E814 ULC S115 ASTM F877 ASTM F1960 CSA B137.5 ULC S102.2 ASTM E119 UL 263 NSF/ANSI/CAN 61 ULC S101 NSF/ANSI 14	IAPMO-ES HUD MR 1269 ICC-ES-PMG cNSFus-pw UL U.P.Code cQAIus P321

## L'installation

Use any product designed to mount 1" copper pipe as a mounting bracket. For more information, refer to the Uponor Piping Systems Installation Guide.

## Applications connexes

PEX-a Plumbing Systems

## Notes de bas de page

## Coordonnées de la personne-ressource

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517